



BY APPOINTMENT TO H.M. THE QUEEN
MANUFACTURERS OF FLOORCOVERING
FORBO FLOORING UK LTD, KIRKCALDY

CI/SfB
| (43) | Tn6 |
July 2011



Carpet tiles

tessera®
westbond®

creating better environments

forbo
FLOORING SYSTEMS

Contents

Introduction	03
Carpet Tiles	
Our environment	06
Carpet tiles	10
Carpet tile construction	11
Tessera	12
Westbond	13
Tessera direct	14
Tessera	
Loop pile	
Apex 640	18
Arran [NEW]	20
Atrium	22
Barcode	24
Format	26
Helix	28
Inline	30
Optimum Create Loop	32
Primera ²	34
Rippleweave ²	36
Teviot	38
Random Lay. batchless	
Mix	42
Cut & Loop pile	
Alignment [NEW]	46
Alignment Highlights [NEW]	48
Ethos [NEW]	50
Cut pile	
Acrobat	54
Sheerpoint	56
Sottsass DNA Collection [NEW]	58
DNA/RNA	60

Westbond	
Fusion bonded	
Colour	64
Flex	72
Natural	76
Technical specifications	80
Services and variants	81
Plan design	82
Website/Floor planner	83
Marmoleum, Project vinyl,	84
Coral & Nuway entrance systems	85
Clean & Care and maintenance	86
The next step	87

If you are looking for something new, why not browse our latest collections

Arran	20
Sottsass DNA Collection	58

You're thinking
time is precious

We're thinking
we agree

Forbo Flooring Systems is a global producer of world-class flooring solutions, employing approximately 3000 people worldwide with an international network of 12 production sites and sales offices in over 37 countries. We constantly strive to produce sustainable flooring systems that create better environments everywhere.

We enhance the interior environment by offering innovative and beautifully designed flooring products boasting long life and consistent high quality. At the same time we help to take care of the natural environment through our commitment to sustainable development and responsible raw material procurement and manufacturing processes.

We have a comprehensive product offer for commercial, public sector and residential interiors; recently extended as a result of our acquisition of Bonar Floors. Now, to complement our long



established market leading linoleum, project vinyl and residential collections, we also supply a comprehensive collection of commercial quality carpet tiles and a unique range of flocked floor coverings. Furthermore, to prevent footborne soil and moisture from spoiling the appearance of interior floor finishes and causing unnecessary wear and tear, we provide co-ordinated and fully integrated entrance matting systems to meet the needs of any type of building in any location.

With a range of subfloor systems, Eurocol and floor care products to complete this extensive and versatile product portfolio, Forbo Flooring Systems can deliver total solutions' for every project, assuring quality and accountability from a single supplier whilst saving you time and money.

You're thinking multiple projects & suppliers

...in workspaces

We offer floor coverings specifically designed to meet the aesthetic and functional demands of today's commercial interiors and public sector buildings and have designs in sheet and tile and resilient and textile constructions, to suit every type of workspace, from the most dynamic and vibrant interior spaces through to more subdued and formal surroundings.

...in healthcare

From the operating theatre to the patient bedroom, Forbo offers total flooring solutions to meet the stringent performance and maintenance criteria demanded across all parts of the healthcare sector. Our advanced resilient ranges are the choice of the healthcare specifier for their outstanding strength, durability and unique hygienic properties.



...in education

From nurseries to academies and universities, educational establishments demand attractive, hardwearing, low maintenance flooring solutions. We satisfy these demands in full with our linoleum, carpet tiles, Flotex and vinyl floor coverings which also offer critical acoustic, conductive and slip-resistant properties.



...in leisure and retail

With large collections of luxury vinyl tiles, colourful sheet vinyl and linoleum designed for heavy traffic areas, Forbo floor coverings can be specified to match any retail formula and enhance every type of department store and leisure facility.

...in industry and transportation

Our expertise extends into the industrial and transportation sector where we offer fire retardant entrance systems, safety flooring and wall cladding solutions from our heavy duty linoleum and project vinyl ranges.

...in the home

Whilst Forbo is best known for its world-class flooring solutions for commercial interiors, we also design and manufacture floor coverings for domestic interior environments. Discerning homeowners may also benefit from the reassurance of quality, durability and design for which Forbo is justifiably renowned.



We're thinking integrated solutions

We've been manufacturing flooring for over a hundred years so there's plenty of experience when it comes to supplying high quality floor coverings and finishes to meet your requirements.

With such a comprehensive range of flooring solutions Forbo can supply exactly what you need to create beautiful high performance floors in every part of your building.


For optimum aesthetic appeal and performance, different floor finishes can be combined to create an integrated design scheme.

We can help you every step of the way. Tell us about your project and let us know your priorities. We'll guide you through our product range and recommend options that will meet your needs whether you're looking for general purpose flooring or a specialist solution.

When ready, our design service can then take a paper plan or PDF file of your interior scheme and convert it into a design board which presents all selected flooring finishes, complete with actual samples.


For more information on this service please contact our design team on **01772 332 620**.

For more details on the plan view service, please turn to page 82.

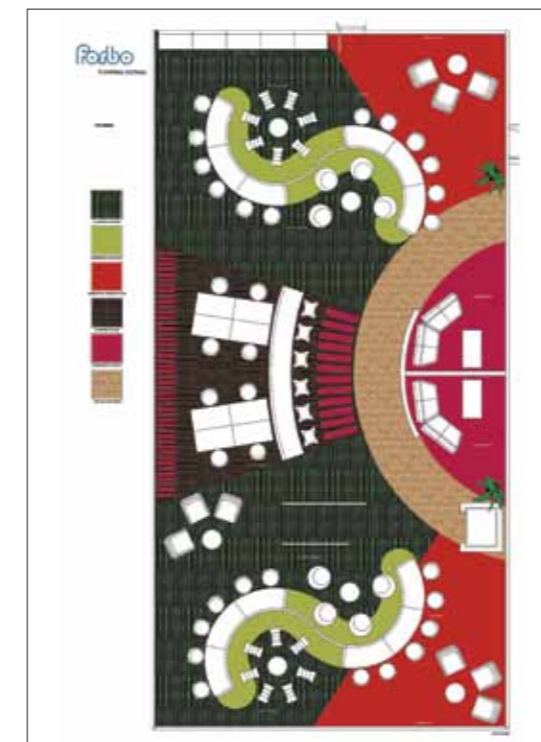

Plan for Loughborough university which won CFA installation of the year 2011.

Textile flooring: Carpet tiles	tessera® westbond™
Linoleum	marmoleum® artoleum® walton touch bulletin board® furniture linoleum
Project vinyl: General purpose Safety Acoustic ESD Design & loose lay tiles Wetroom	eternal step® surestep step® safestep sarlon® colorex® allura Forbo LVT 0.55 flex design safestep grip onyx
Flocked flooring: Flotex	flotex®
Entrance flooring: Entrance systems	coral® nuway®
Residential	marmoleum® flotex® novilon® enduro
Service products: System solutions	forbo quickfit subfloor system eurocol

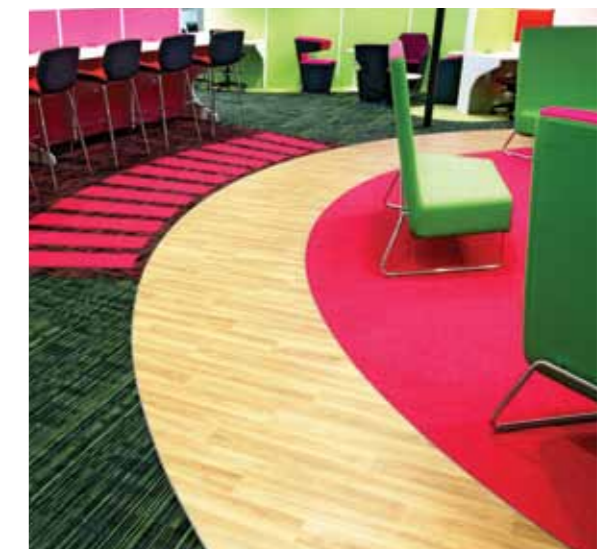

You're thinking real sustainability

As a global leader in flooring systems we have a responsibility to all our stakeholders, to create a better environment. The way we serve and drive the market sets the pace and standard for world class flooring solutions. Sustainable development and 'creating better environments' are integral parts of all of Forbo Flooring Systems' activities.

We're fully committed to reducing our impact upon the environment, not only in the way we run our manufacturing sites but also in terms of our actions and operations beyond the factory boundaries.

We've adopted a cradle-to-grave approach in order to identify every possible opportunity to improve our use of scarce resources, eliminate waste, maximise efficiency and recycle and reuse materials.

Creating better environments

Our target

To continuously minimise the environmental impact of Forbo Flooring Systems as measured by the weighted categories in our independently verified Life Cycle Assessment measurement system by 25% before the end of 2015 (cf 2009).


Measurement

Forbo uses Life Cycle Assessment (LCA) as the independent methodology of measuring our impact on the environment. Based on LCA assessment we already out perform the industry average in resilient flooring categories. Forbo's range of textile products is currently being assessed.

We shall succeed by:

- By applying Forbo's 4 R's

Reduce
Renewable
Reuse
Recycle
...in this order

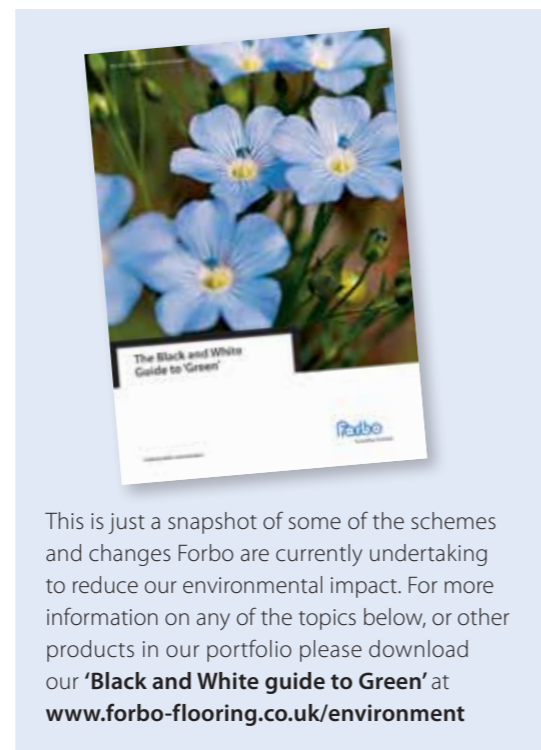

We're thinking responsible action

Carpet tiles and the environment

Recycling production waste

Westbond's tile backing is produced by accessing a number of PVC waste streams, not only from our own factories but also from those of our competitors. The process is therefore making a significant impact on the amount of vinyl waste sent to landfill across the industry.



Recycling post-industrial waste

The waste created by cutting sheet carpet into tiles has been significantly reduced through the use of ultrasonic cutting technology. The little waste that is now generated is sent for recycling either as a fuel source in a 'waste to energy' generator or into road repair material.




Packaging and point of sale

Over 97% of our packaging is made from recycled or renewably sourced materials and 100% is recyclable. We also offer customers a 'no box' option. When it comes to presenting our carpet tiles to customers we use sample book material produced from recycled cardboard and Polyethylene Terephthalate (rPET – recycled and recyclable) vacuum formed trays.

Bit Winder

Investment in new reprocessing technology has reduced the amount of yarn waste we send to landfill by 75 tonnes per annum. Residue yarn is now rewound and used in the edges of the carpet tile that form the trim waste.

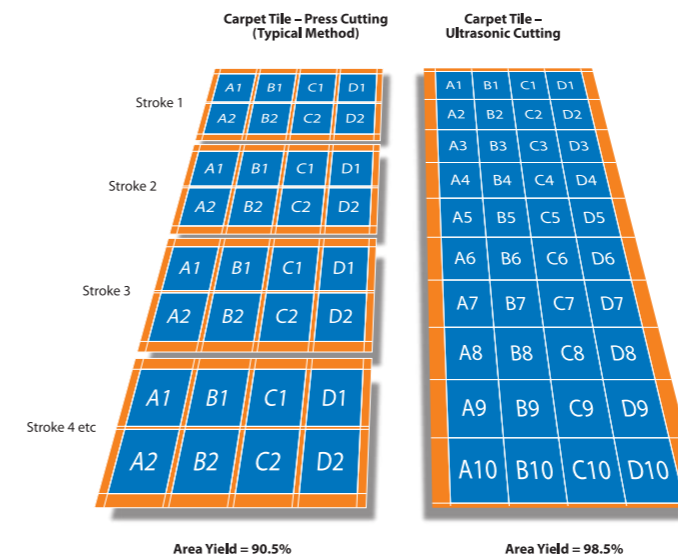


Save a Sample Scheme

Our unique Save a Sample scheme reduces landfill and the need for virgin raw material. If you have any Forbo samples you require collecting please visit www.forbo-flooring.co.uk/saveasample



You're thinking real sustainability

Westbond offers a range of carpet tiles containing pure and natural undyed wool with a recycled backing, Westbond Natural. Forbo has also joined the 'Campaign for wool' in an effort to promote this natural and renewable resource.



THE CAMPAIGN FOR WOOL
PATRON: HRH THE PRINCE OF WALES

A selection of Tessera ranges have been designed to include unusually high recycled yarn content e.g. Inline contains up to 55% recycled yarn.

Tessera Mix, Forbo's random lay and batchless carpet tile range reduces installation waste to 2% and avoids the need for attic stock.



Westbond



Tessera Mix

Certification:

ISO14001/ISO 9001

All our UK manufacturing sites are certified to internationally recognised quality (ISO 9001) and environmental (ISO 14001) management system standards.

Forbo Flooring is a member of UK Green Building Council.



CRUK:

Forbo is a member of Carpet Recycling UK.



CRUK has a target to divert 25% of carpet waste from landfill by 2015 recovering valuable raw materials. Since the inception of CRUK in 2008 the landfill diversion rate has increased from 2% to 10% with more than 40,000 tonnes of waste carpet being recovered in 2010.

BRE/LEED

Tessera and Westbond carpet tiles have been assessed to BRE Global's environmental assessment methodology. In addition, some of our most popular Tessera carpet tiles also achieve the American CRI Emission Green Label+, a measure of indoor air quality required in order for products to be specified under a LEED build scheme.



We're thinking responsible action

BREEAM specific ratings for product ranges							
Product Description	Building Type Commercial	Education	Health	Domestic	Retail (Durability)	Retail (Fashion)	1999 Results
Tessera							
Format	A	A	A	A	A	A+	B
Teviot	A	A	A	B	A	A+	A
Primera	A	A	A	B	A	A+	B
Mix	A	A	A	B	A	A+	B
Helix	B	A	A	B	B	A+	B
Optimum Create Loop	B	A	A	B	B	A+	B
Ethos	B	A	A	B	B	A+	B
Sheerpoint	B	B	B	C	B	A	B
Softbac® Results							
Teviot with Softbac®	A	A+	A+	A	A	A+	B
Helix with Softbac®	A	A+	A+	A	A	A+	B
Ethos with Softbac®	A	A+	A+	A	A	A+	B
Format with Softbac®	A	A	A	A	A	A	B
Primera with Softbac®	A	A	A	A	A	A	B
Mix with Softbac®	A	A	A	B	A	A	B
Optimum Create Loop with Softbac®	A	A	A	B	A	A	B
Sheerpoint with Softbac®	B	A	A	B	B	A	B
Westbond							
N9000	B	B	B	C	B	A	N/A
N9000 with Cushionbac	C	C	C	D	C	A	N/A
Wool Nylon Polyester (80/10/10) 1200g	D	D	D	D	D	A	N/A

Advantages of carpet tiles

Carpet tiles offer many advantages against broadloom carpet.

Today's modern office environments with open office systems are designed for flexibility to accommodate frequent layout changes. A modular floor can be quickly adapted to new requirements thereby reducing the cost of reorganisation. Where carpet tiles are installed, telephone, electrical and other underfloor systems remain easily accessible for these changes to be made.

- Carpet tiles can be rotated from areas of high wear to areas of low wear, and damaged or soiled tiles can be replaced simply and quickly
- Tiles can be easily shipped to site and moved around the building. Installation is easier and faster than conventional carpet, with less waste
- Less waste means that less material is required so that more of your flooring investment goes onto the floor
- Carpet tiles allow for more design flexibility and different textures and colours can be combined to create walkways and feature areas

With all this flexibility, we're sure that whatever the specification, whatever the budget, you'll find exactly what you need in our carpet tile portfolio. Because we design every one of our carpet tiles to give long term performance and appearance retention, you can be assured that whichever Tessera or Westbond product you choose, your installation will keep its superior good looks day after day, year after year.



Carpet tile construction

Our carpet tiles are designed and manufactured with various pile constructions to give specific aesthetic and performance benefits.

loop pile

Carpet tiles with a standard loop pile construction are designed to maintain their good looks in the most demanding heavy traffic areas of buildings such as corridors and reception areas. Textured loop piles offer distinctive in-built texture and contemporary styling coupled with a robust and durable construction.



random lay. batchless

A random-lay tile is cleverly designed so that it may be laid in any direction to produce a totally individual installation. Different production consignments of 'batchless' tiles can be used together in an installation without the usual risk of visible batch variation. Tessera's random-lay batchless carpet tiles have been made possible through the use of advanced CMC tufting technology.



cut & loop pile

Cut and loop pile tiles feature a clever hybrid construction that offers all the robustness of a conventional loop pile product but with the superior aesthetics and more luxurious feel of a cut pile carpet tile. Tessera offers a range of cut and loop pile tiles suited to all types of office environments.



cut pile

Softer and more luxurious than loop pile, cut pile carpet tiles are ideal for boardrooms and meeting rooms in addition to general office environments. Tessera offers cut pile tile ranges in a variety of yarns and pile weights to meet different performance requirements.



fusion bonded

Fusion bonding is a sophisticated method of carpet tile manufacture where individual yarn pile is bonded onto the backing material to make an extremely dense and luxurious product. Each tuft is individual and a high proportion of the yarn is in the wear surface providing a beautiful, rich velour carpet tile which gives an excellent broadloom appearance. All of our Westbond products are made in this specialised way.



Tessera and Westbond carpet tiles

Tessera and Westbond carpet tiles are renowned for their aesthetic styling and outstanding performance in the most demanding heavy traffic environments. Side by side these two long established reputable brands offer specifiers and their clients an unrivalled carpet tile offer to meet every possible design brief.

Tessera

Tessera offers attractive and hardwearing tufted carpet tiles in various pile constructions and textures, designed to deliver specific aesthetic and performance benefits. The comprehensive range includes contemporary and classic styles, plains and patterns, and colourways to enhance all types of commercial and public sector interiors.



Tessera Inline



Tessera Primera²

Westbond

The Westbond brand and product range is synonymous with total flexibility and sophistication. Blending yarns to order and manufacturing premium quality fusion bonded tiles in an almost infinite number of colourways, with **no minimum order quantity**, Westbond allows customers to take control of the process of designing luxurious, bespoke carpet tiles with exceptionally heavy pile weights for the most prestigious installations.

Inside this brochure you will find 144 of our most popular Westbond Colours, along with our flex creator service allowing you to design a truly personal installation.

Westbond Natural is a unique collection containing pure and natural undyed wool, a perfect answer to today's ecological concerns.



Westbond Flex



Westbond Colour

Tessera direct

Through the popular Tessera direct scheme, customers and their clients benefit from a guaranteed delivery promise.

Order up to 500m² of the most popular 24 shades of Teviot, any shade of Mix, Format or Barcode carpet tiles and not only will you receive a superb high performance product, your delivery is guaranteed.*

When more than 500m² is required we cannot guarantee delivery within 5 working days but we will always agree a delivery date with you to help you plan ahead.

*Terms and conditions apply. Available on request.

Products available with the Tessera direct scheme:

tessera[®] teviot

Suitable for every type of commercial installation

Teviot can be specified with confidence throughout the building, wherever an attractive and particularly hardwearing modular floor covering is required.

Available in 24 blended colourways, Teviot offers an exceptionally diverse palette with classic and contemporary shades to co-ordinate beautifully with any interior.

See page 38 for further details.



Teviot saxe blue

tessera[®] barcode

Suitable for creating design orientated, high impact interiors

Barcode is offered in 18 colourways, each featuring five individual tonal and contrasting shades drawing from the latest colour palette of solution dyed yarns, carefully selected and blended to harmonise with a wide range of interior design schemes.

Further enhancing the versatility of this attractive floor covering, Barcode can be laid in a variety of styles including brick, tessellated, quarter-turn or the quirky alternative, quarter-brick, to create a range of different aesthetic effects.

See page 24 for further details.



Barcode time line



What to do next

For further information on Tessera Teviot, Mix, Format and Barcode carpet tiles or to request a sample, please ring **0800 731 2369** or contact your local Forbo Business Area Manager.

tessera[®] format

Suitable for heavy traffic environments

A universally attractive carpet tile suitable for heavy traffic environments in all types of commercial premises. Format boasts a high castor chair rating, making it an ideal and cost-effective solution for busy offices large and small.

Carefully co-ordinated space dyed yarns provide a subtle flecked effect throughout the tile, adding visual interest to the floorspace and enhancing its soil hiding properties.

See page 26 for further details.



Format blue monday

tessera[®] mix

Random lay and batchless design

The shading, tones and textures of this distinctive carpet tile have been created using advanced 'Infinity' tufting technology which allows the pile height of every loop in every tile to be varied individually.

Manufactured using hardwearing lightfast Antron[®] yarns from Invista, Mix is offered in 12 contemporary colourways. The subtle shading and tonal design results in carpet tiles that are random and batchless.

See page 42 for further details.



Mix bone

tessera®

Loop pile

Carpet tiles with a standard loop pile construction are designed to maintain their good looks in the most demanding heavy traffic areas of buildings such as corridors and reception areas.

There are various styles of loop pile products in the Tessera range covering level loop and designer loop constructions.



Barcode main line

tessera® apex 640

tessera® arran

tessera® atrium

tessera® barcode

tessera® format

tessera® helix

tessera® inline

tessera® optimum create loop

tessera® primera²

tessera® rippleweave²

tessera® teviot

tessera[®] apex 640

The Apex 640 collection of low level loop pile carpet tiles features a contemporary palette of 22 tonal colourways with universal appeal, designed to meet the aesthetic requirements of modern offices everywhere.

Stylish good looks are combined with high technical performance. Apex 640 is manufactured from 100% Aquafil solution-dyed nylon yarn, renowned for its low dust and dirt penetration and superior colour fastness. Accordingly, Apex 640 delivers the appearance retention, wear resistance and sheer durability required in heavy traffic areas, even when subjected to intensive cleaning regimes.



















Apex reef



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Apex 640 carpet tiles meet the requirements of EN 1307

Description	Level loop pile carpet tile
 Dimensions	50cm x 50cm (Other sizes available for special orders)
 Total thickness	6.0mm ± 10%
Pile height	2.5mm ± 0.5mm
 Collection size	22 colourways, 5m ² per box
 Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
 Pile composition	100% Aquafil 'Alto Chroma' polyamide
Dye method	100% solution dyed
Stitch density	189,120 per m ² ± 10%
 Pile weight	640gsm ± 10%
Total weight	3,955gsm ± 10%
Primary backing	Polyester
 Secondary backing	Modified bitumen and polyester fleece
 Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.8


 Light fastness BS EN ISO 105: B02	≥6
 Dimensional stability BS EN 986	≤0.2%
 Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Apex 640 carpet tiles are manufactured using 100% green electricity.
 CRI CRUK	Apex 640 meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
 Installation method	Broadloom, quarter turn or tessellated
Apex 640 carpet tiles meet the requirements of EN 14041	
 Reaction to fire EN 13501-1:2002	B _{f1} -s1
 Slip resistance	DS: ≥0.30
 Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing



tessera[®] arran

Arran's natural, almost 'artisan' appearance belies the complexity of its multi-height textured loop pile design and the state of the art manufacturing technology behind it. Using CMC Infinity machinery Forbo's designers have developed a carpet tile with unashamedly irregular peaks and furrows which broadlooms beautifully to deliver an alluringly tactile linear design offering real warmth.

Arran is offered in a broad range of 18 colourways comprising natural and more vibrant tones to complement today's most contemporary interior environments. Each tile features a carefully blended duo of yarns, 100% solution dyed to ensure the subtle colour contrasts are maintained throughout the lifespan of the flooring, even in the most demanding environments subjected to intensive cleaning regimes.

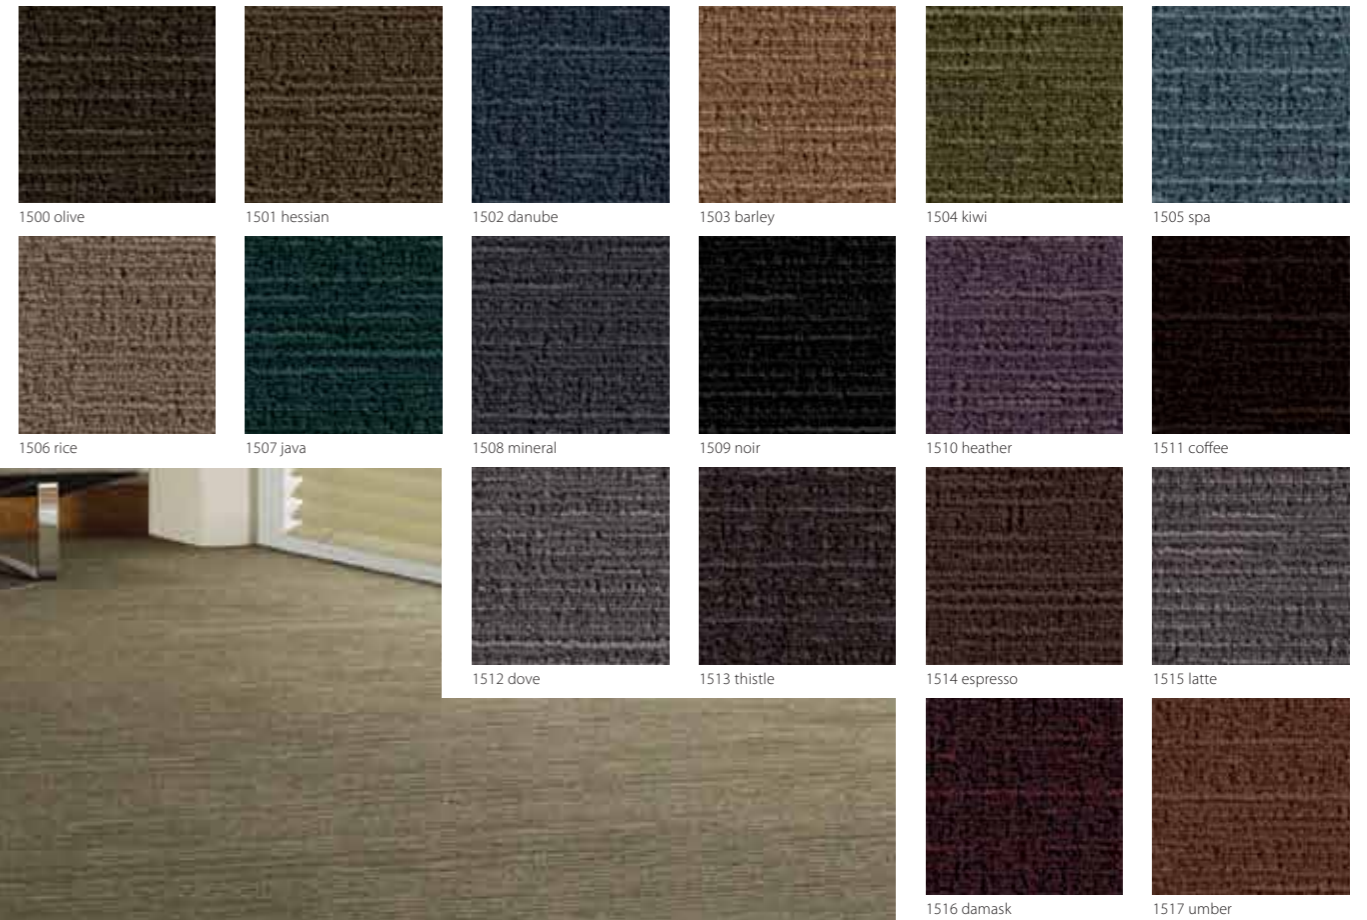

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.



Arran olive

Orientation to suit your needs


Through the use of CMC technology, Arran has been cleverly designed to allow you to create two very different appearance finishes. Whether you are after a high design linear effect, or a rugged textural look, Arran carpet tiles can easily and stylishly meet your needs.

Arran avoids the market place 'norm' of high contrast colours to create the look of texture and instead boasts a broad tone-on-tone colour bank.

Creating the designs

By simply changing the orientation of the fitting, two effects can be created by using the same tiles.

Both 'looks' are laid in a broadloom fashion, but are either laid across the main direction of traffic, or with the main direction of traffic as shown above.

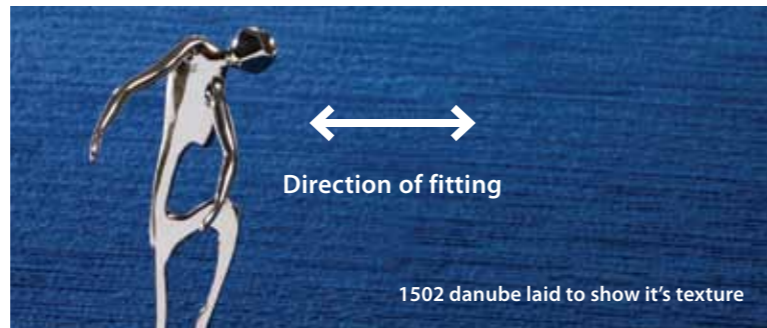

Arran carpet tiles meet the requirements of EN 1307

Description	Tufted multi-pile height loop carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	7.5mm ± 10%
Pile height	4.0mm ± 0.5mm
Collection size	18 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Invista Antron Lumena
Dye method	100% solution dyed
Stitch density	203,097 per m ² ± 10%
Pile weight	950gsm ± 10%
Total weight	4,565gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.9

Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Arran carpet tiles are manufactured using 100% green electricity. Arran meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
CRI CRUK	Arran meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Broadloom, quarter turn or tessellated
Arran carpet tiles meet the requirements of EN 14041	
Reaction to fire EN 13501-1:2002	B _{f1} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®] atrium

Atrium is a heavy contract carpet tile at a very affordable price, providing an excellent choice for any office environment.

A structured loop pile tile manufactured from 100% polyamide, this great all rounder offers outstanding wear performance and appearance retention, keeping its good looks year after year.

The 24 colourways in the palette have been designed specifically for the commercial market and cover an unusually broad spectrum.









These bold colours have been carefully selected to work in combination, introducing opportunities to delineate walkways through open plan areas and create contrasting break out zones and design features.









Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Atrium regatta


Atrium carpet tiles meet the requirements of EN 1307




Description	Loop pile carpet tile
 Dimensions	50cm x 50cm (Other sizes available for special orders)
 Total thickness	6.9mm ± 10%
Pile height	3.5mm ± 0.5mm
 Collection size	24 colourways, 5m ² per box
 Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
 Pile composition	100% Aquafil 'Alto' polyamide
Dye method	100% piece dyed
Stitch density	104,000 per m ² ± 10%
 Pile weight	700gsm ± 10%
Total weight	4,600gsm ± 10%
Primary backing	Polyester
 Secondary backing	Modified bitumen and polyester fleece
 Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.1



 Light fastness BS EN ISO 105: B02	≥5
 Dimensional stability BS EN 986	≤0.2%
 Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels.
 CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
 Installation method	Broadloom, quarter turn or tessellated

Atrium carpet tiles meet the requirements of EN 14041



 Reaction to fire EN 13501-1:2002	B _{fl} -s1
 Slip resistance	DS: ≥0.30
 Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®] barcode

Barcode challenges the uniformity and rigidity of conventional linear low level loop pile tiles and, with its confident bands of contrasting colours in varying widths, delivers a more eclectic and exuberant look that is right on trend for today's commercial environments.


Barcode is offered in 18 colourways, each featuring five individual tonal and contrasting shades drawing from the latest colour palette of solution dyed yarns, carefully selected and blended to harmonise with a wide range of interior design schemes.

Further enhancing the versatility of this attractive floor covering, Barcode can be laid in a variety of styles including brick, tessellated, quarter-turn or the quirky alternative, quarter-brick, to create a range of different aesthetic effects.

Barcode carpet tiles are available via the Tessera Direct Delivery Service. See page 14 for further details.



Barcode main line

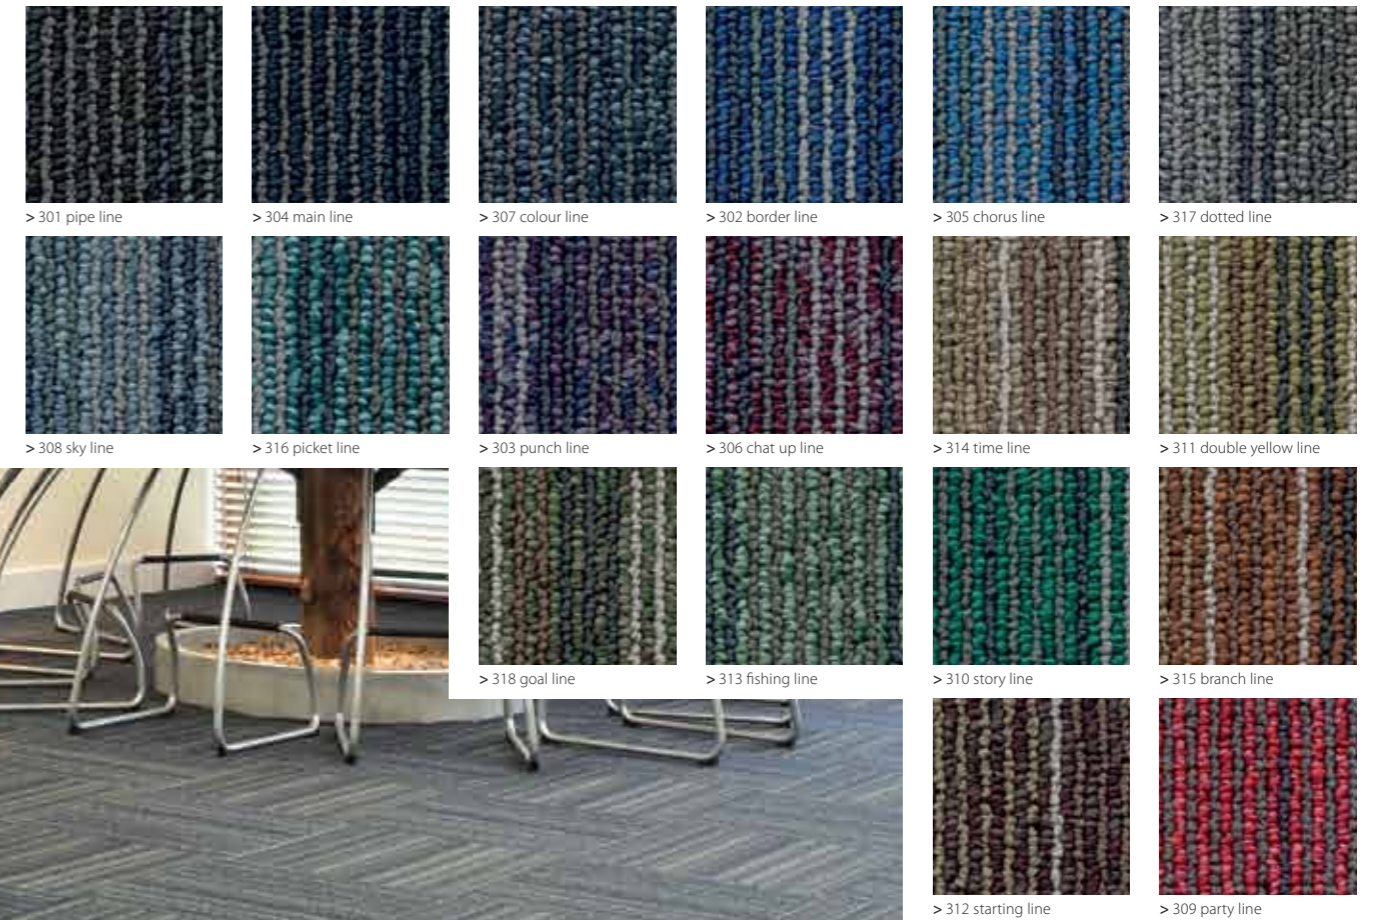

See page 14.



Barcode carpet tiles meet the requirements of EN 1307	
Description	Low level loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	6.5mm ± 10%
Pile height	3.0mm ± 0.5mm
Collection size	18 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Alto chroma polyamide
Dye method	100% solution dyed
Stitch density	169,420 per m ² ± 10%
Pile weight	580gsm ± 10%
Total weight	3,895gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.8
Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Barcode carpet tiles are manufactured using 100% green electricity. Barcode meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
CRI CRUK	Barcode meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Brick, quarter turn, tessellated or quarter-brick
Barcode carpet tiles meet the requirements of EN 14041	
Reaction to fire EN 13501-1:2002	B _{f1} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

tessera[®] format


With a distinctive textured construction and a broad colour palette of 18 contemporary and commercially attractive tonal shades, Format has taken low loop pile tiles into a new dimension.

This hardwearing heavy contract carpet tile, manufactured using new high tech tufting machines combines rich texture with densely packed low loops for superior aesthetic appeal and real added value.

A universally attractive carpet tile suitable for heavy traffic environments in all types of commercial premises, Format boasts a high castor chair rating, making it an ideal and cost-effective solution for busy offices large and small.

Manufactured from 80% solution dyed yarn, with enhanced resistance to fading over time or through intensive cleaning, Format is a particularly attractive proposition for areas prone to soiling. Carefully co-ordinated space dyed yarns provide a subtle flecked effect throughout the tile, adding visual interest to the floorspace and enhancing its soil hiding properties.

Format carpet tiles are available via the Tessera Direct Delivery Service. See page 14 for further details.

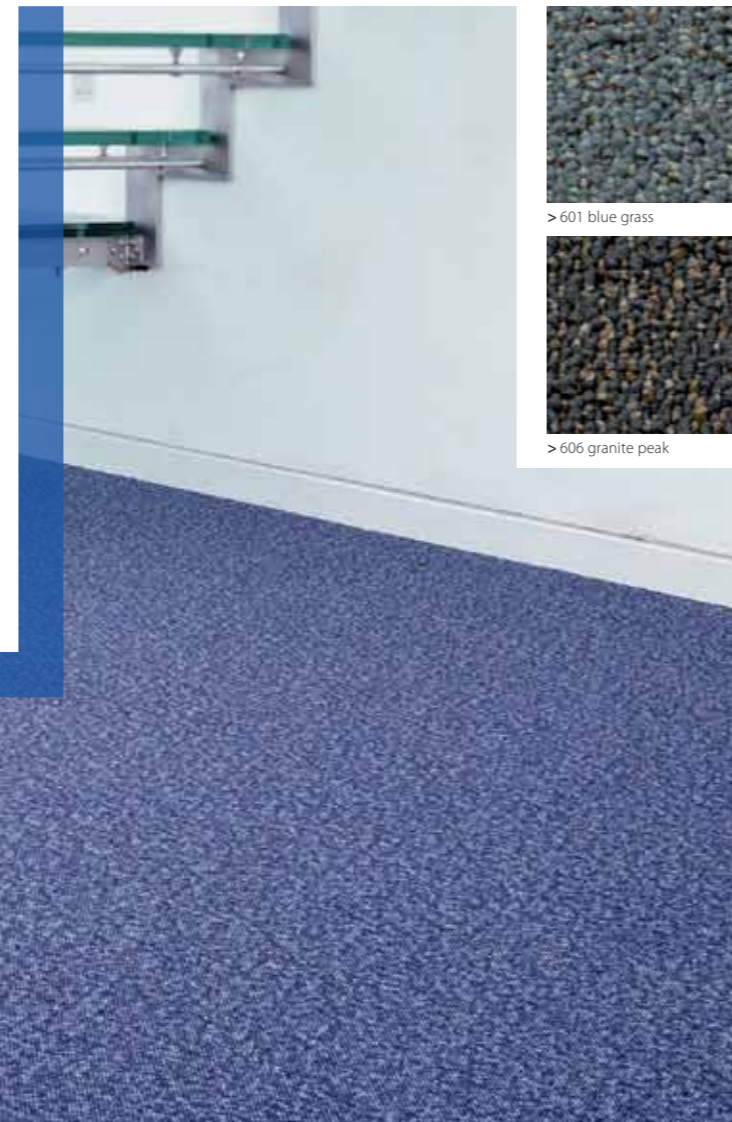

Format blue monday



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Format carpet tiles meet the requirements of EN 1307	
Description	Textured loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	6.1mm ± 10%
Pile height	3.0mm ± 0.5mm
Collection size	18 colourways, 5m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Aquafil polyamide
Dye method	80% solution dyed, 20% space dyed
Stitch density	255,312 per m ² ± 10%
Pile weight	525gsm ± 10%
Total weight	4,140gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.7



BRE Global Listed	
Carpet Recycling UK Member	
CRI +PLUS	
Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Format carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
BRE	Format carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
CRI	Format meets 01350 indoor air quality standard.
CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Broadloom, quarter turn or tessellated
Format carpet tiles meet the requirements of EN 14041	
Reaction to fire EN 13501-1:2002	B _{f1} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®] helix

The use of high lustre Antron[®] 'metallic' yarn in Helix gives a restrained reflective quality to this distinctive multi-height loop pile tile.

The silver coloured nylon thread is cleverly juxtaposed with Antron's solution dyed yarns drawn from a contemporary colour palette comprising greys, taupes, blues and beiges. Inspiration for these 13 muted and subdued colourways is derived from architectural materials and the hues of the modern urban landscape.



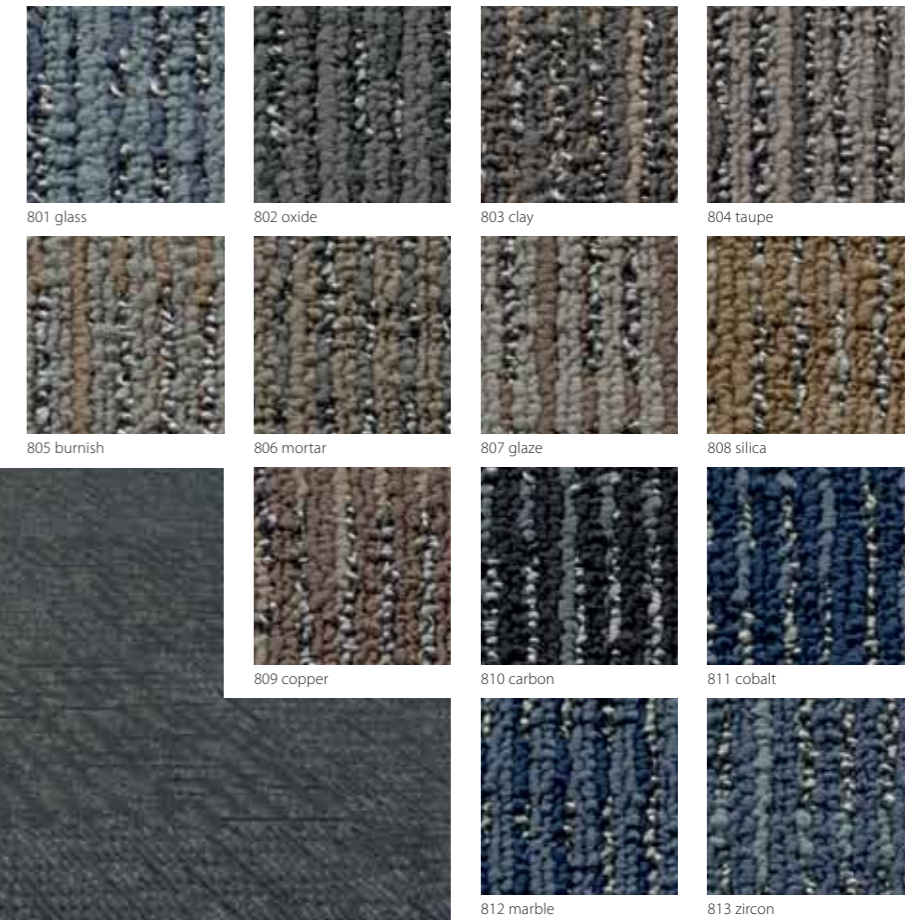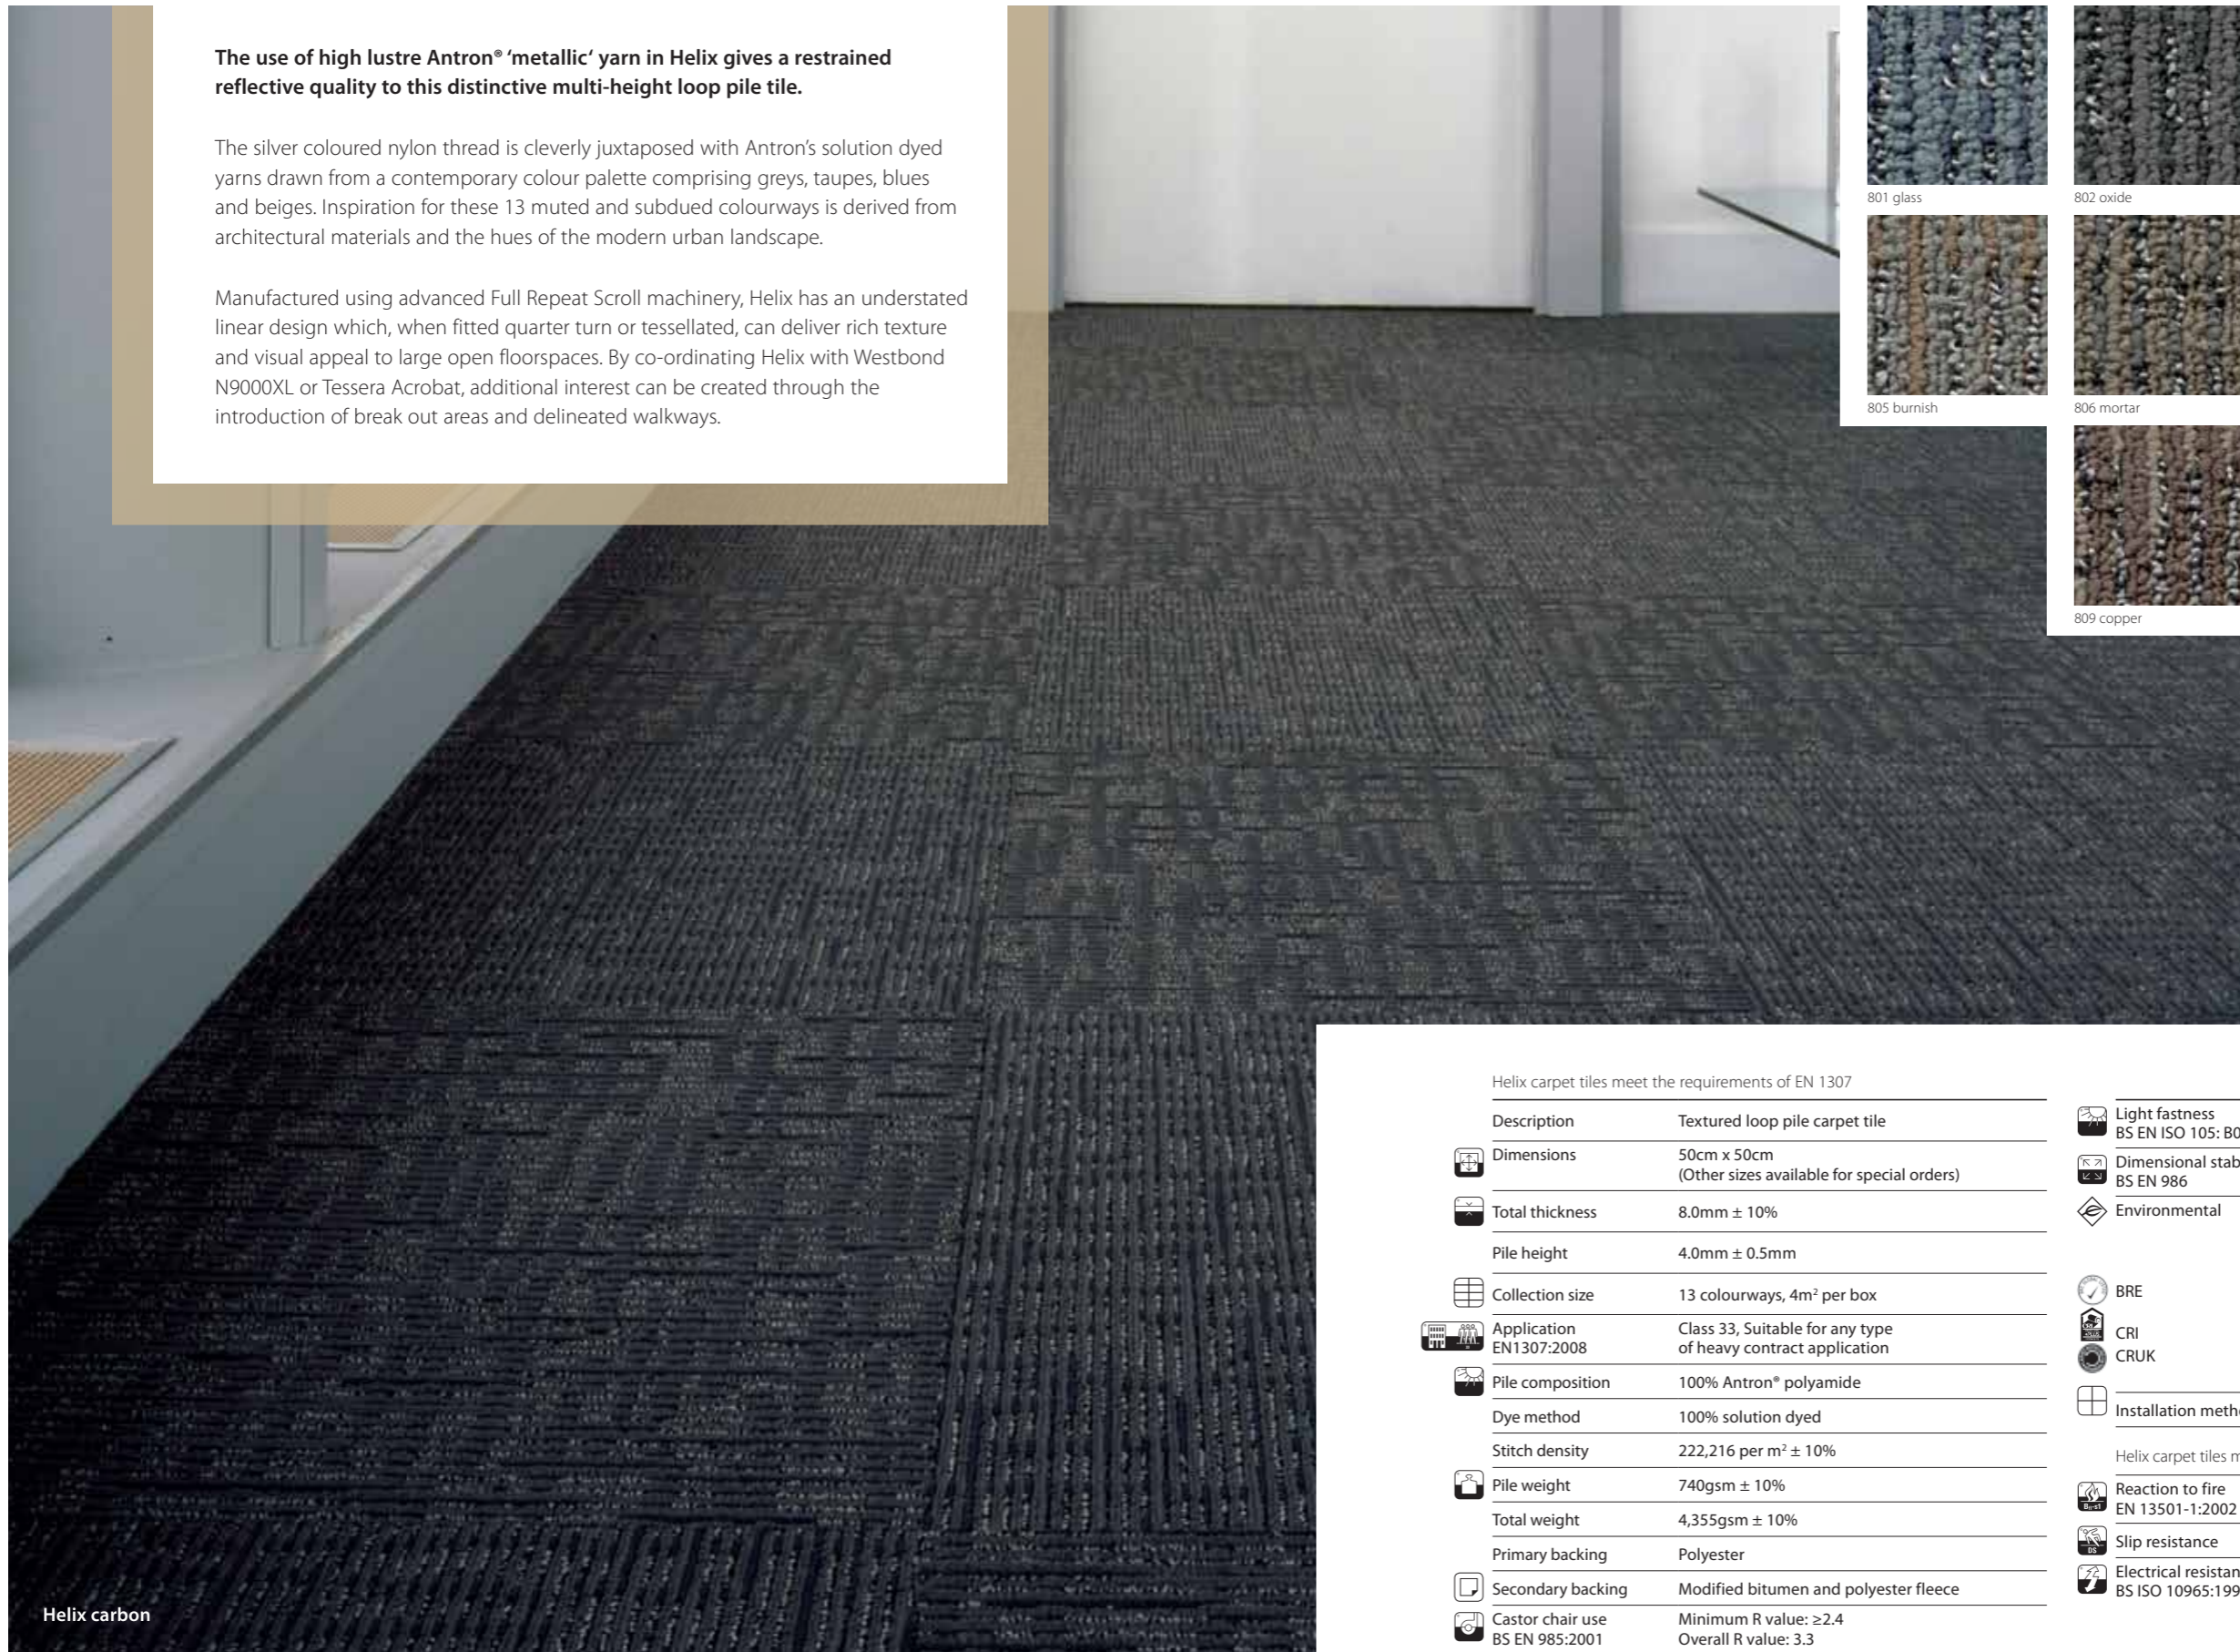





Manufactured using advanced Full Repeat Scroll machinery, Helix has an understated linear design which, when fitted quarter turn or tessellated, can deliver rich texture and visual appeal to large open floorspaces. By co-ordinating Helix with Westbond N9000XL or Tessera Acrobat, additional interest can be created through the introduction of break out areas and delineated walkways.










Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.






Helix carpet tiles meet the requirements of EN 1307

Description	Textured loop pile carpet tile
 Dimensions	50cm x 50cm (Other sizes available for special orders)
 Total thickness	8.0mm ± 10%
Pile height	4.0mm ± 0.5mm
 Collection size	13 colourways, 4m ² per box
 Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
 Pile composition	100% Antron [®] polyamide
Dye method	100% solution dyed
Stitch density	222,216 per m ² ± 10%
 Pile weight	740gsm ± 10%
Total weight	4,355gsm ± 10%
Primary backing	Polyester
 Secondary backing	Modified bitumen and polyester fleece
 Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.3

 Light fastness BS EN ISO 105: B02	≥6
 Dimensional stability BS EN 986	≤0.2%
 Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Helix carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
 BRE	Helix carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
 CRI	Helix meets 01350 indoor air quality standard.
 CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
 Installation method	Quarter turn or tessellated

Helix carpet tiles meet the requirements of EN 14041

 Reaction to fire EN 13501-1:2002	B _{fl} -s1
 Slip resistance	DS: ≥0.30
 Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing



EN 14041

Helix carbon

tessera[®] inline

One of a new generation of cleverly textured loop pile tiles from Tessera, Inline adds a completely new twist to the concept of linear design.

Featuring rich, differential texture, Inline provides a strong directional pattern, randomly interspersed with patches of tonal relief.









This 'broken linearity' and combination of high and low level loops, delivers a visually interesting backdrop for any commercial interior design scheme. The forgiving design masks tile edges resulting in a broadloom appearance when laid in monolithic fashion.









Manufactured from a premium polyamide 6.6 yarn system with an unusually high recycled content, Inline offers a palette of restrained tonal shades.



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Inline alpha

Inline carpet tiles meet the requirements of EN 1307	
Description	Textured loop pile carpet tile
 Dimensions	50cm x 50cm (Other sizes available for special orders)
 Total thickness	7.5mm ± 10%
Pile height	4.5mm ± 0.5mm
 Collection size	12 colourways, 4m ² per box
 Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
 Pile composition	100% Universal polyamide 6.6
Dye method	100% solution dyed
Stitch density	236,400 per m ² ± 10%
 Pile weight	540gsm ± 10%
Total weight	4,155gsm ± 10%
Primary backing	Polyester
 Secondary backing	Modified bitumen and polyester fleece
 Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.8

 Light fastness BS EN ISO 105: B02	≥5
 Dimensional stability BS EN 986	≤0.2%
 Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Inline carpet tiles are manufactured using 100% green electricity. Inline meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
 CRI CRUK	Inline meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
 Installation method	Broadloom, quarter turn or tessellated
Inline carpet tiles meet the requirements of EN 14041	
 Reaction to fire EN 13501-1:2002	B _{f1} -s1
 Slip resistance	DS: ≥0.30
 Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing



tessera[®] optimum create loop

With 16 commercially appealing tiles in the collection, Optimum Create Loop offers an ideal floor covering solution for busy office environments large and small, and for corridors, reception areas and other heavy traffic areas.

Featuring bold flecks and multi-height loops, these richly textured tiles deliver a deceptive broadloom appearance and boast effective soil hiding properties. Their structured appearance is retained over time as texture is built into the tile using advanced scroll repeat machinery.

The generous pile depth provides a touch of luxury and enhances underfoot comfort. A contemporary palette of colourways means that Optimum Create Loop will complement a wide range of interior design schemes and may be teamed up with many cut pile or fusion bonded tiles. Each tile is manufactured using 100% solution dyed yarns for long lasting colour retention and resistance to fading.



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Optimum create loop pigeon

Optimum create loop carpet tiles meet the requirements of EN 1307

Description	Loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	7.5mm ± 10%
Pile height	4.5mm ± 0.5mm
Collection size	16 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Antron [®] polyamide
Dye method	100% solution dyed
Stitch density	189,000 per m ² ± 10%
Pile weight	760gsm ± 10%
Total weight	4,550gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.1


BRE GLOBAL LISTED	
CARPET RECYCLING UK MEMBER	
CRI	
CRUK	
BRE	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels.
CRI	Optimum create loop carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
CRUK	Optimum create loop meets O1350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Broadloom, quarter turn or tessellated
Optimum create loop carpet tiles meet the requirements of EN 14041 EN 14041	
Reaction to fire EN 13501-1:2002	B _{fl} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®] primera²

A versatile and extremely hardwearing loop pile carpet tile, Primera² has a well proven track record in the most demanding heavy traffic areas and has earned an excellent reputation for performance and durability.

The balanced tuft construction results in a practical level wear surface with a subtle diagonal direction. Manufactured from 100% polyamide, 80% of which is solution dyed, Primera² resists fading, even when subjected to intensive cleaning regimes, and retains its appearance throughout its long life. As these carpet tiles are constructed using a medley of contrasting solution dyed and space dyed yarns, soil and stains are also cleverly disguised.

The 18 versatile colourways complement a broad spectrum of interior environments.

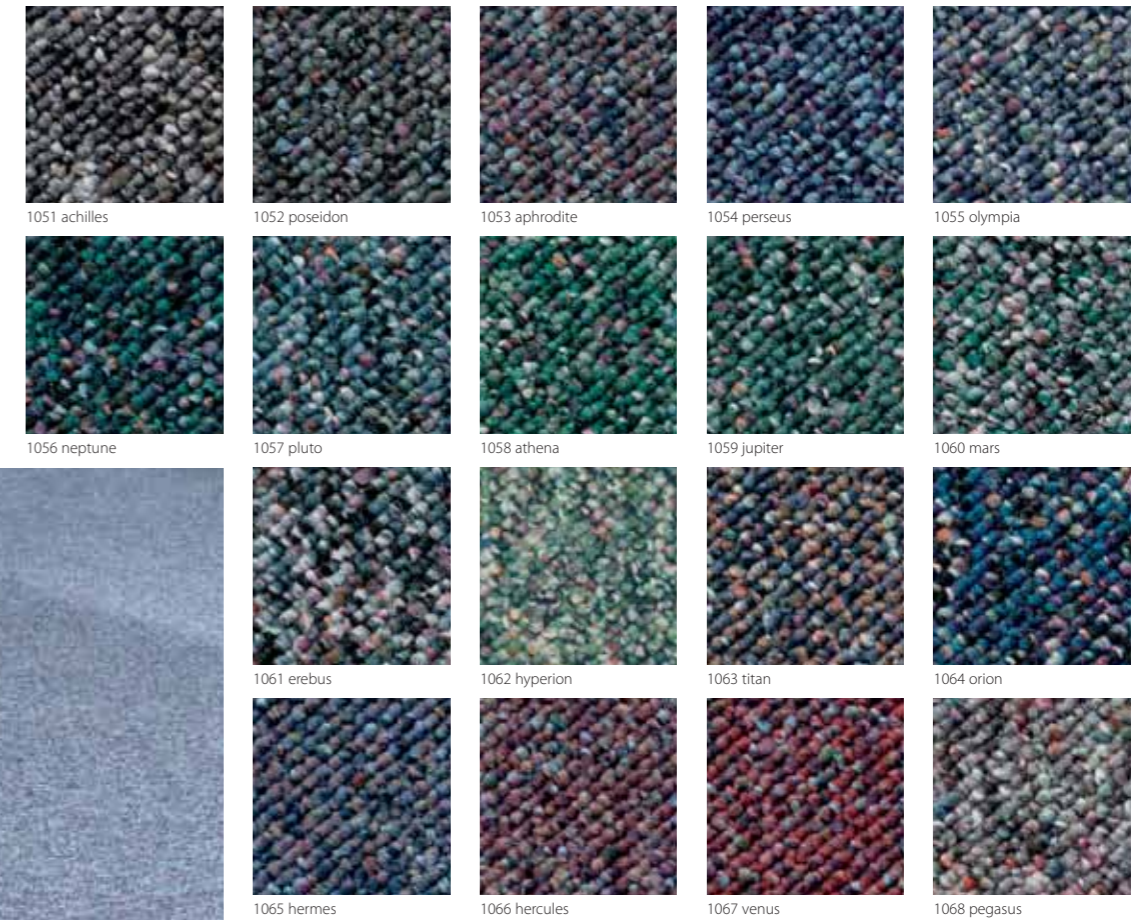

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Primera² perseus

Primera² carpet tiles meet the requirements of EN 1307

Description	Directional loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	8.0mm ± 10%
Pile height	4.5mm ± 0.5mm
Collection size	18 colourways, 4.5m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Radicofil polyamide
Dye method	80% solution dyed, 20% space dyed
Stitch density	93,840 per m ² ± 10%
Pile weight	750gsm ± 10%
Total weight	4,750gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.9

	Light fastness BS EN ISO 105: B02	≥6
	Dimensional stability BS EN 986	≤0.2%
	Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Primera ² carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
	BRE	Primera ² carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
	CRI	Primera ² meets 01350 indoor air quality standard.
	CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
	Installation method	Broadloom, quarter turn or tessellated
Primera ² carpet tiles meet the requirements of EN 14041		
	Reaction to fire EN 13501-1:2002	B _{fl} -s1
	Slip resistance	DS: ≥0.30
	Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®] rippleweave²

The rich undulating texture of this luxurious floor covering designed for high end commercial interiors and hospitality environments is perfectly captured by the name rippleweave².

Taking state-of-the-art Infinity CMC tufting technology into previously uncharted waters, Tessera has created a sophisticated textured loop pile carpet tile that flows across the floor delivering an unmistakable look of opulence and a superior level of underfoot comfort.

Rippleweave's rich tactile texture is achieved by incorporating heavyweight four ply Antron[®] Lumena 100% solution dyed polyamide yarns in a complex multi-height loop pile design. The result is a heavy contract carpet tile quite unlike any other, offering a very generous pile weight of 950gsm and long-lasting appearance retention.



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.



Rippleweave² barnstone

Rippleweave² carpet tiles meet the requirements of EN 1307

Description	Tufted loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	8.0mm ± 10%
Pile height	4.5mm ± 0.5mm
Collection size	7 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Invista Antron [®] Lumena
Dye method	100% solution dyed
Stitch density	160,752 per m ² ± 10%
Pile weight	950gsm ± 10%
Total weight	4,565gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.6

Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Rippleweave ² carpet tiles are manufactured using 100% green electricity.
CRI CRUK	Rippleweave ² meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Brick, quarter turn or tessellated

Rippleweave² carpet tiles meet the requirements of EN 14041

Reaction to fire EN 13501-1:2002	B _{fl} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing





tessera® teviot

With over 5 million square metres already installed, Teviot is Tessera's most popular low level loop pile carpet tile and without doubt one of the best selling carpet tiles in the UK.

Suitable for every type of commercial installation, Teviot can be specified with confidence throughout the building, wherever an attractive and particularly hardwearing modular floor covering is required. Manufactured from 100% Aquafil polyamide, and boasting a high castor chair rating, it has the resilience and durability needed to contend with the heavy wheeled traffic conditions often found in busy office environments.

Available in 36 blended colourways, Teviot offers an exceptionally diverse palette with classic and contemporary shades to co-ordinate beautifully with any office interior.

24 of the 36 shades of Teviot are available via the Tessera Direct Delivery Service. The available shades are marked with the Tessera Direct symbol. See page 14 for further details.

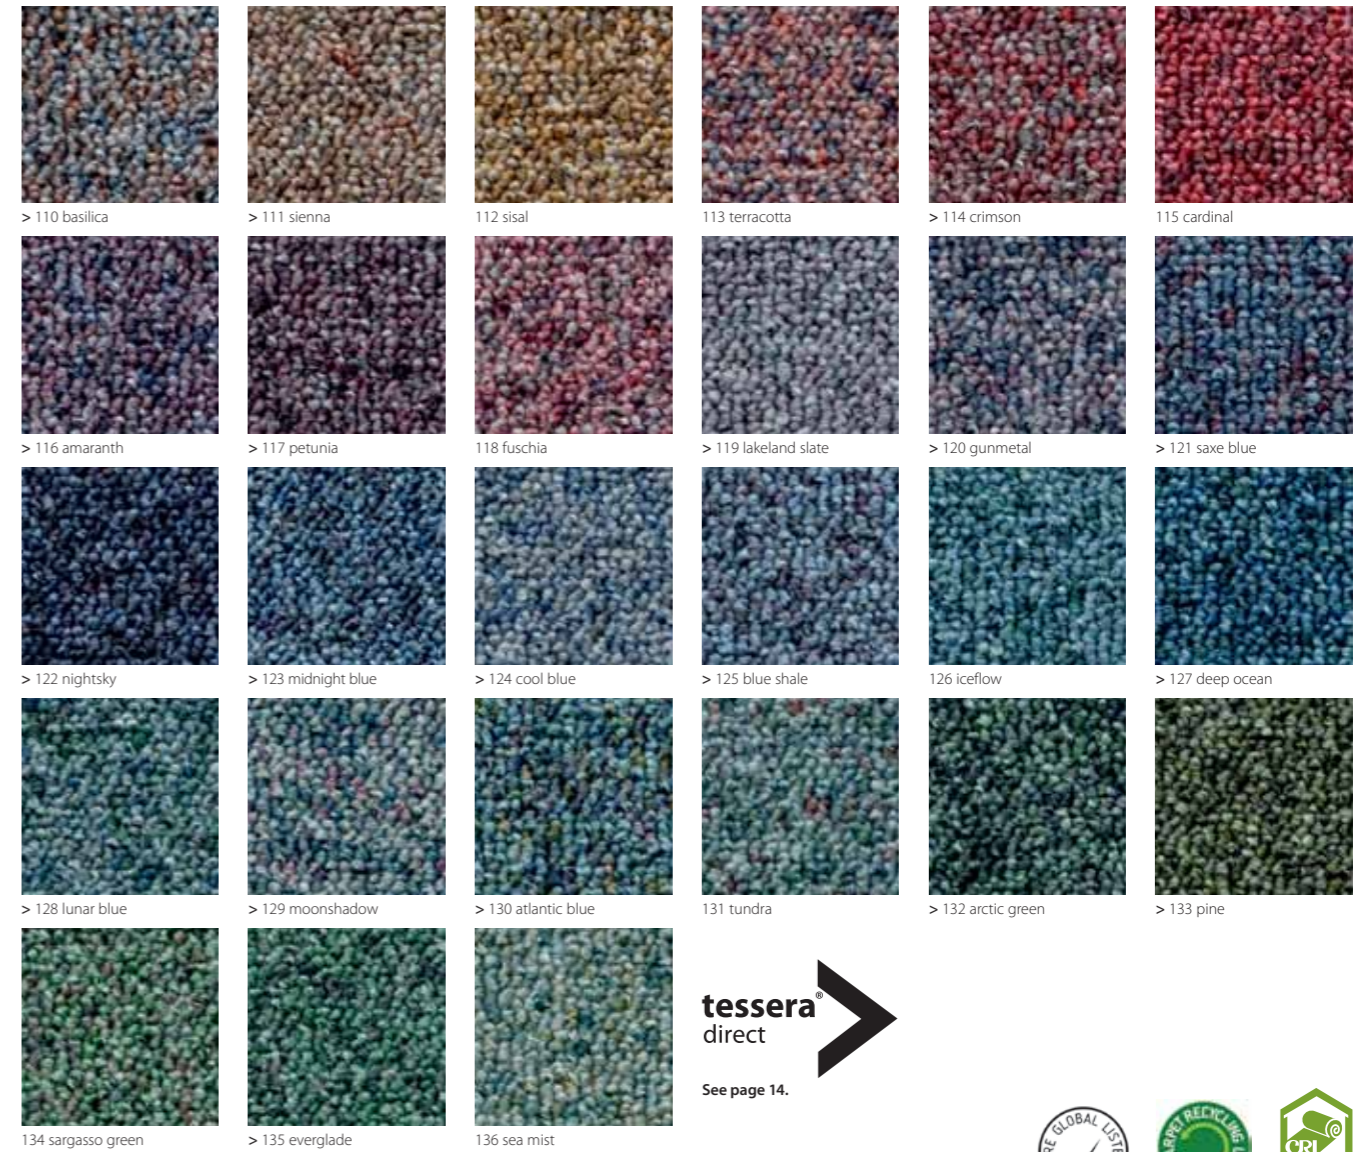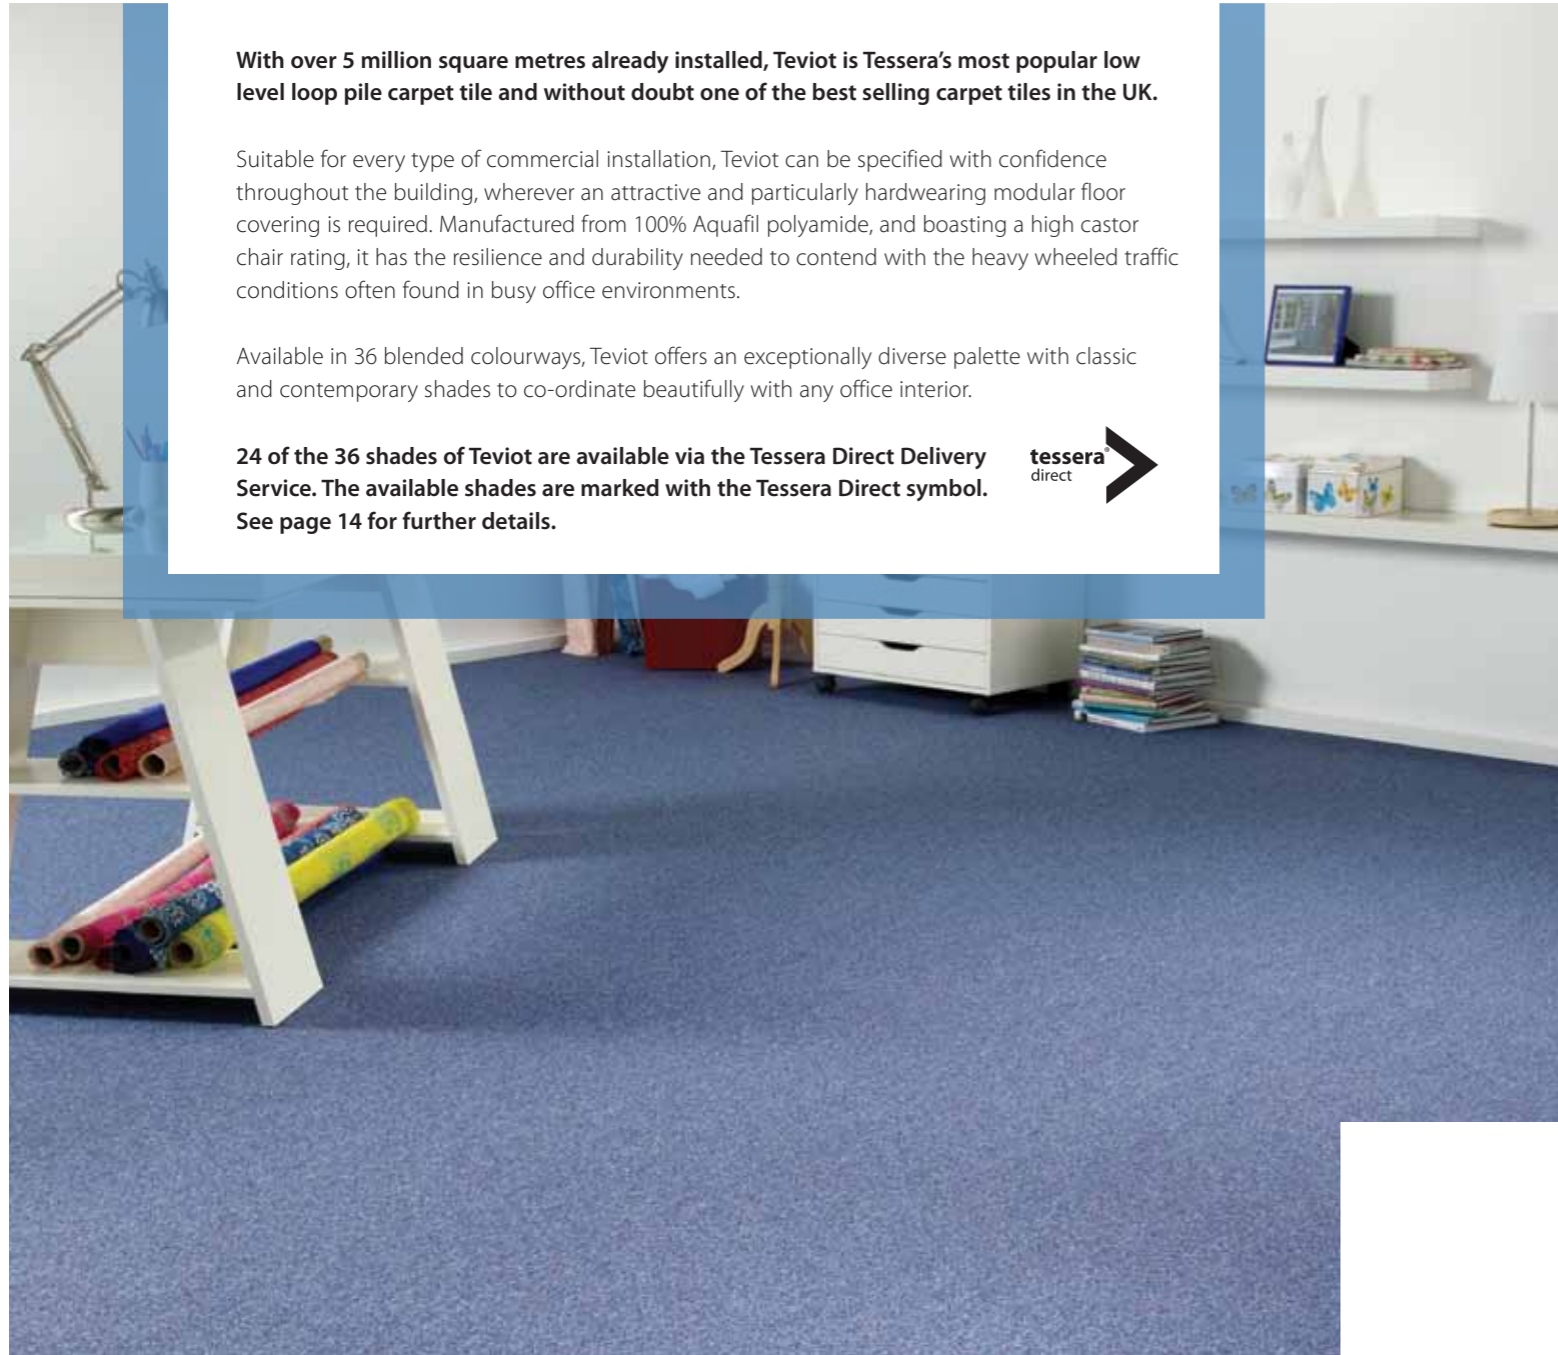

See page 14.



Teviot carpet tiles meet the requirements of EN 1307



Description	Low level loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	6.0mm ± 10%
Pile height	2.5mm ± 0.5mm
Collection size	36 colourways, 5m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Aquafil polyamide
Dye method	100% space dyed
Stitch density	204,880 per m ² ± 10%
Pile weight	520gsm ± 10%
Total weight	3,835gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 3.1

Light fastness BS EN ISO 105: B02	≥6
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Teviot carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification. Teviot meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
BRE	
CRI	
CRUK	
Installation method	Broadloom, quarter turn or tessellated

Teviot carpet tiles meet the requirements of EN 14041

Reaction to fire EN 13501-1:2002	B _{f1} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

Teviot saxe blue

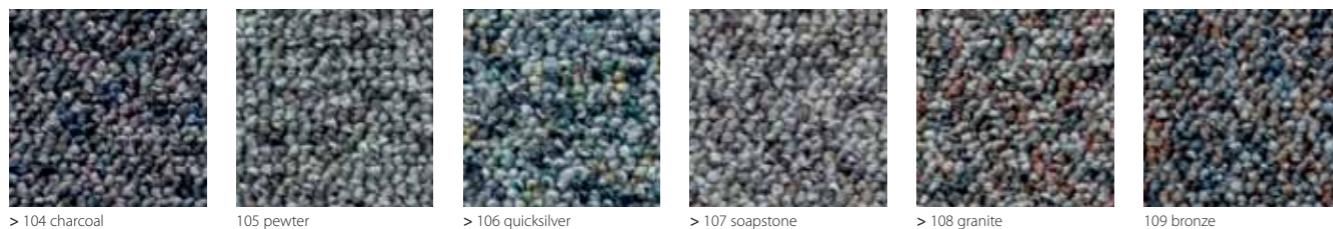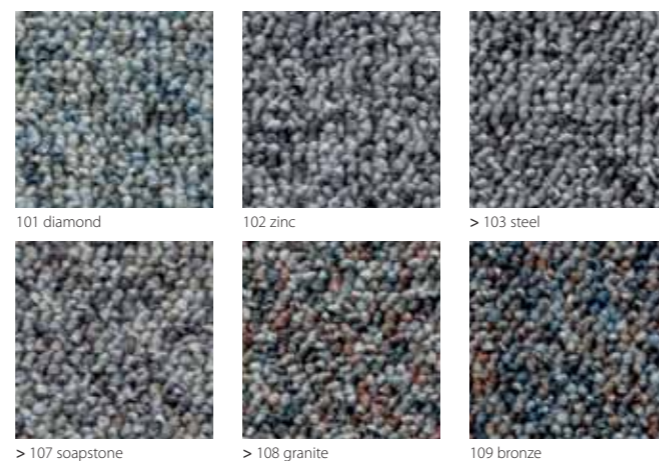

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

tessera®

Random lay, batchless

A random lay tile is cleverly designed so that it may be laid in any direction to produce a totally individual installation. Different production consignments of 'batchless' tiles can be used together without the usual risk of visible batch variation. An additional benefit is that spare stocks do not have to be carried and installation waste is minimised.

Tessera's random lay, batchless tile range has been made possible through the use of advanced CMC tufting technology.

tessera® mix

Mix bone

tessera[®] mix

This innovative random lay, batchless tile delivers a unique installation every time, with angular shapes emerging and gently fusing into softer forms. Its multi-layered appearance cleverly disguises tile edges, creating the illusion of a seamless floor covering.

The shading, tones and textures of this distinctive carpet tile have been created using advanced 'Infinity' tufting technology which allows the pile height of every loop in every tile to be varied individually. No two carpet tiles are identical. There are no directional arrows, as tiles can be laid in any one of four ways. There are no rules. Just an infinite number of permutations.

Manufactured using hardwearing lightfast Antron[®] yarns from Invista, Mix is offered in 12 contemporary colourways. The subtle shading and tonal design results in carpet tiles that are effectively batchless: different dye lots are indiscernible from each other which means spare stocks do not have to be carried and installation waste is minimised.

Mix carpet tiles are available via the Tessera Direct Delivery Service. See page 14 for further details.



See page 14.



Mix bone

Mix carpet tiles meet the requirements of EN 1307

Description	Textured loop pile carpet tile, random lay, batchless
Dimensions	50cm x 50cm
Total thickness	6.5mm ± 10%
Pile height	3.5mm ± 0.5mm
Collection size	12 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Antron [®] polyamide
Dye method	100% solution dyed
Stitch density	203,304 per m ² ± 10%
Pile weight	650gsm ± 10%
Total weight	4,265gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.8

Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Mix carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
BRE	Mix carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
CRI	Mix meets 01350 indoor air quality standard.
CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Random

Mix carpet tiles meet the requirements of EN 14041

Reaction to fire EN 13501-1:2002	B _{f1} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing


Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

tessera®

Cut and Loop

Cut and loop pile tiles feature a clever hybrid construction that offers all the robustness of a conventional loop pile product but with the superior aesthetics and more luxurious feel of a cut pile carpet tile.

Tessera offers cut and loop pile tiles in various aesthetic styles, suited to all types of office environments.

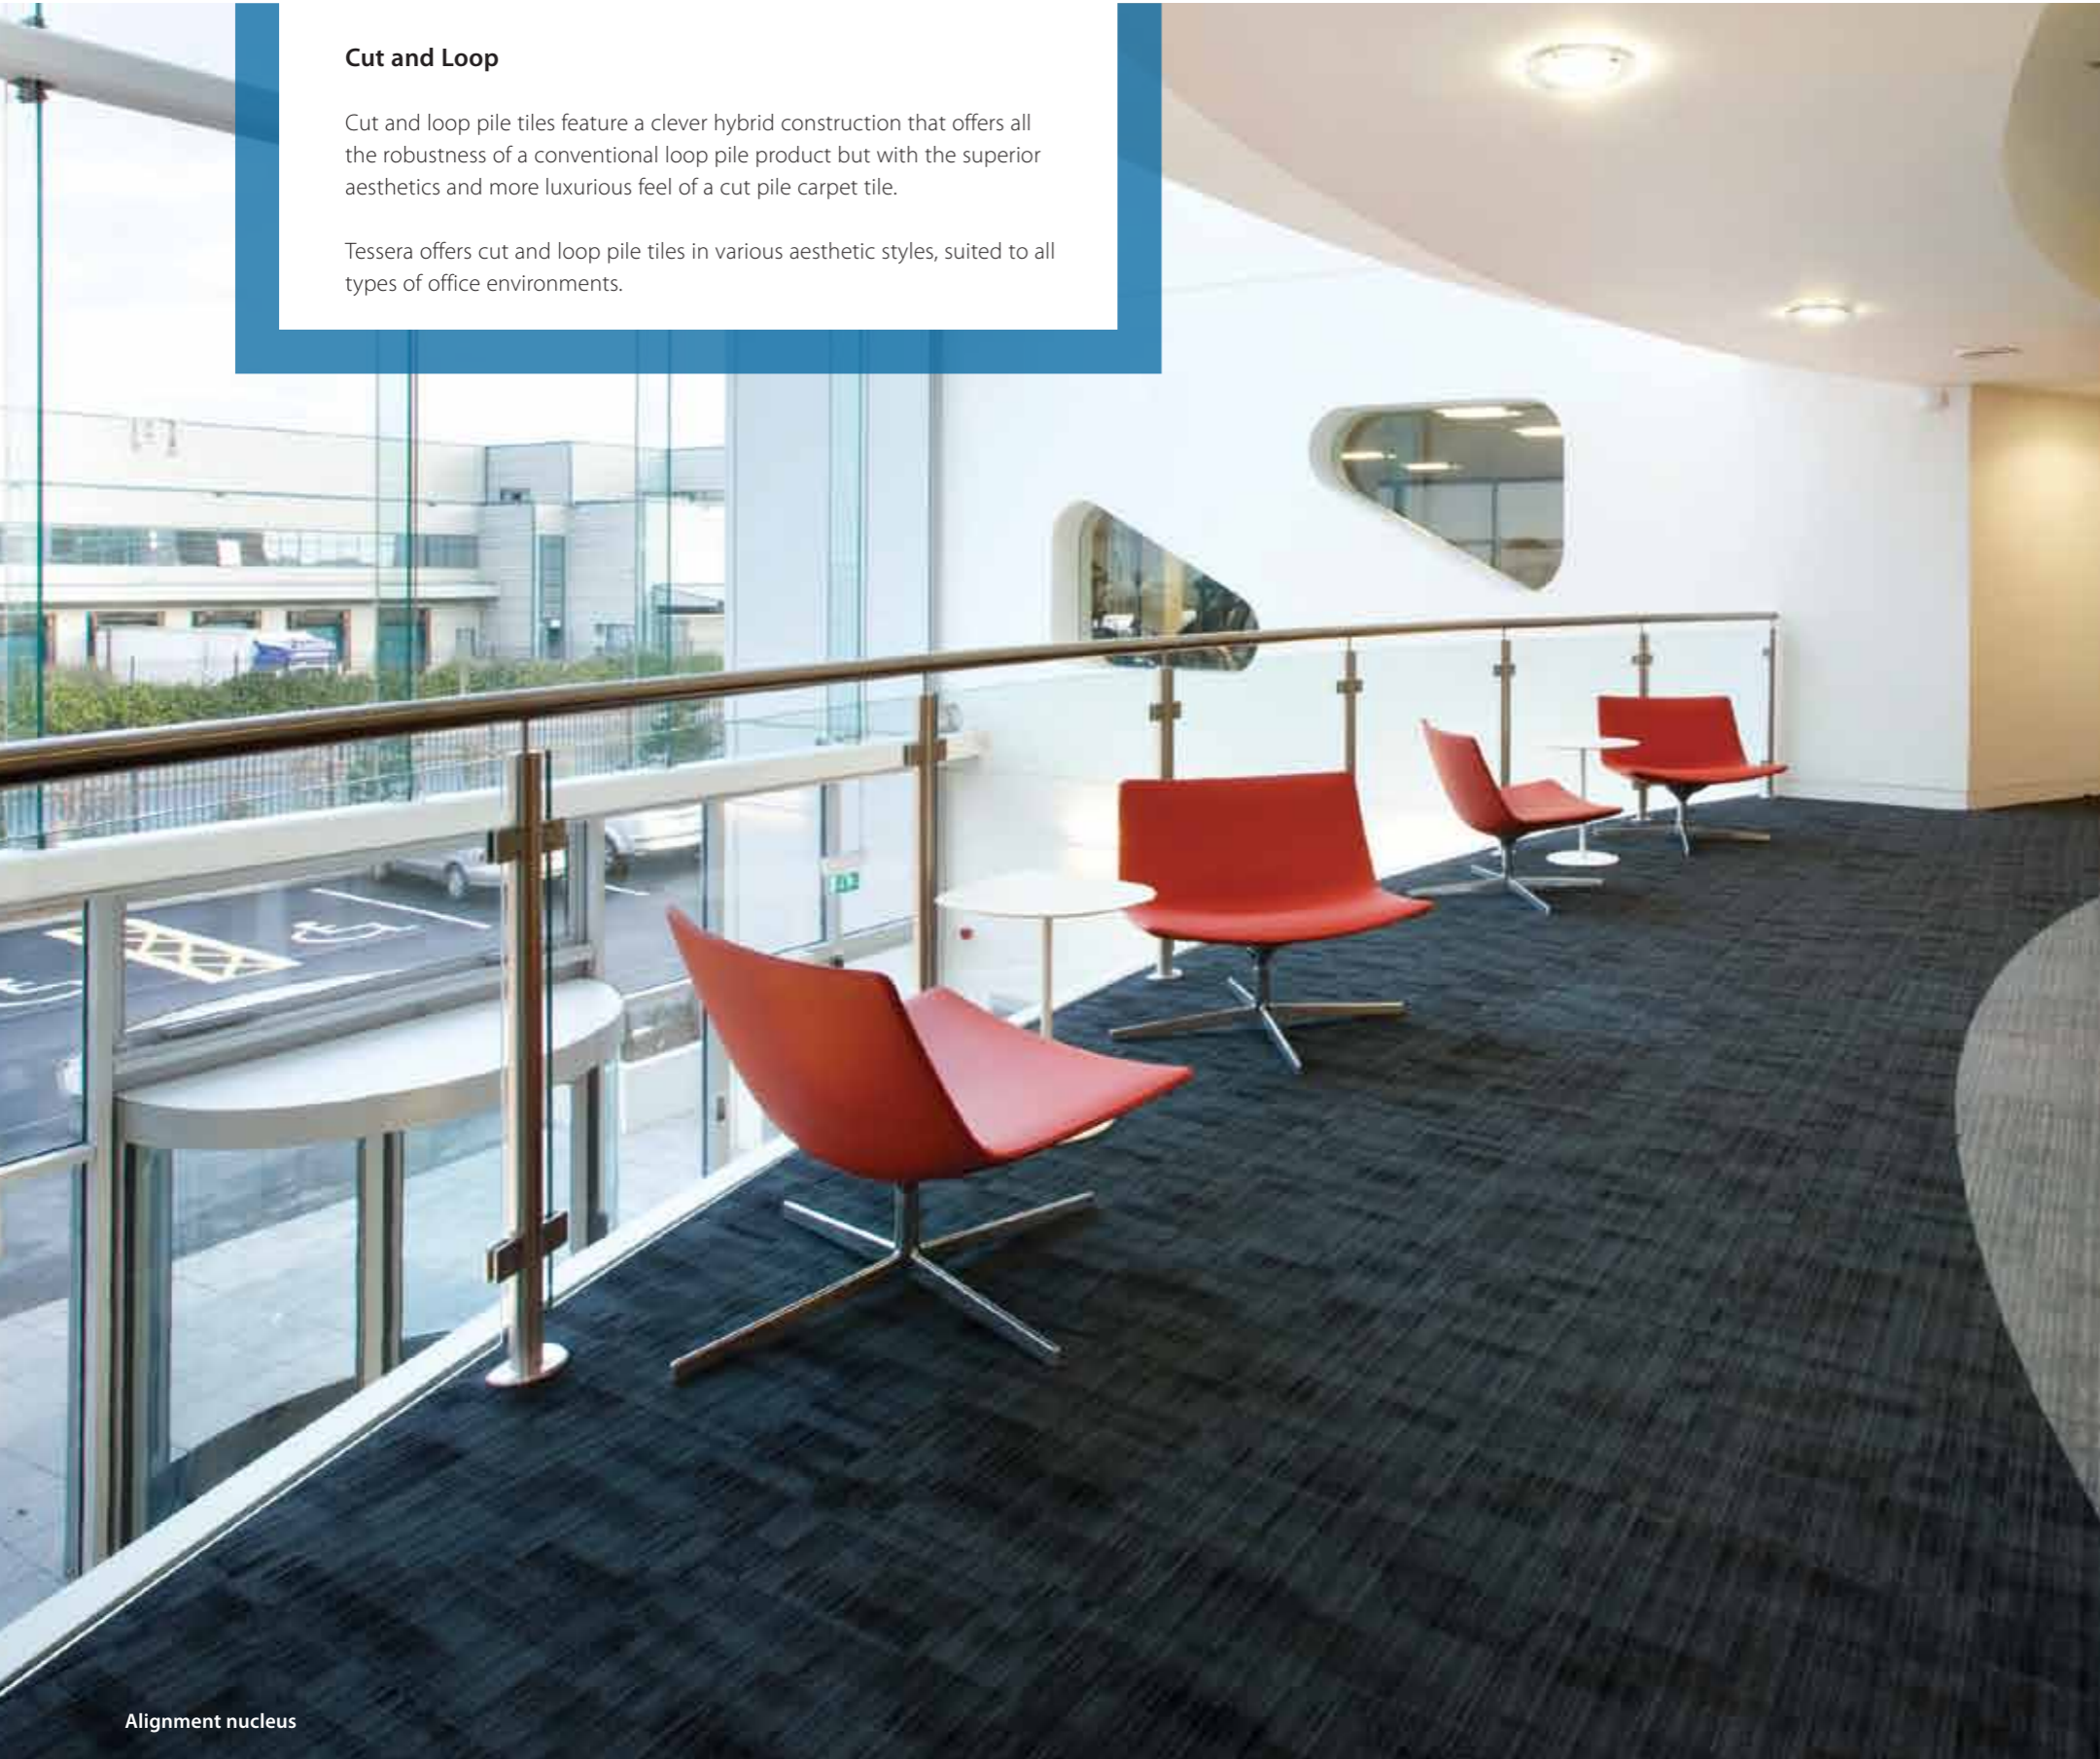

Alignment nucleus

tessera® alignment

tessera® alignment highlights

tessera® ethos



tessera[®] alignment

Alignment is a sophisticated and cleverly textured cut and loop carpet tile designed to complement the most contemporary commercial interiors.

Multi-height loops give this distinctive floor covering a bold directional theme which is tempered by the introduction of intersecting random blocks of rich cut pile. The result is a highly effective broadloom appearance and a unique linear style, equally suited to open plan interiors and more modest enclosed spaces alike.

Alignment is offered in a palette of 16 colourways with strong urban influences and a distinctly cosmopolitan feel. Each colour translation features yarns carefully drawn from a discrete tonal range delivering an understated yet elegant appearance.

Using 100% solution dyed Antron Lumena yarn, Alignment boasts aesthetic appeal, performance and durability.



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Alignment horizon

Alignment carpet tiles meet the requirements of EN 1307

Description	Cut and loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	7.5mm ± 10%
Pile height	4.0mm ± 0.5mm
Collection size	22 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Antron [®] Lumena polyamide
Dye method	100% solution dyed
Stitch density	217,488 per m ² ± 10%
Pile weight	730gsm ± 10%
Total weight	4,345gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.6

Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Alignment carpet tiles are manufactured using 100% green electricity. Alignment meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
CRI CRUK	
Installation method	Broadloom, quarter turn or tessellated
Alignment carpet tiles meet the requirements of EN 14041	
Reaction to fire EN 13501-1:2002	B _{f1} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing




tessera® alignment highlights

Our range of Alignment Highlights offers the opportunity to add visual excitement to the floor scheme.

Designed to complement Nucleus, the most popular colourway in the Alignment range are six perfectly co-ordinated carpet tiles, each featuring a daring accent colour.

These vibrant tiles can be used creatively with Nucleus or on their own to introduce striking breakout areas, cut-outs and borders, and to delineate walkways and individual work zones in open plan spaces.

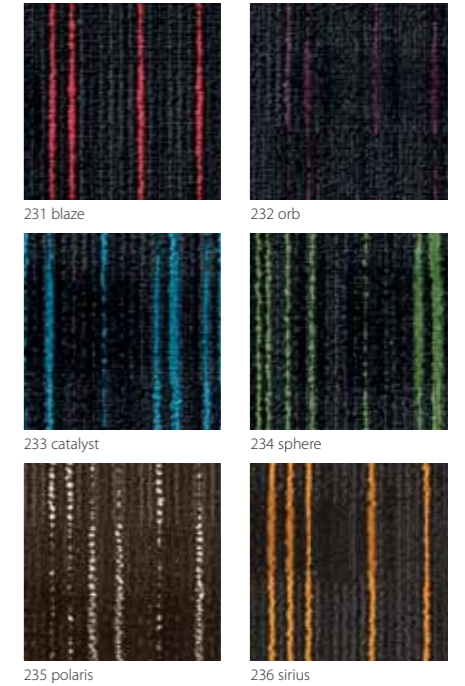

















Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.



Alignment blaze

Alignment carpet tiles meet the requirements of EN 1307

Description	Cut and loop pile carpet tile
 Dimensions	50cm x 50cm (Other sizes available for special orders)
 Total thickness	7.5mm ± 10%
Pile height	4.0mm ± 0.5mm
 Collection size	22 colourways, 4m ² per box
 Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
 Pile composition	100% Antron® Lumena polyamide
Dye method	100% solution dyed
Stitch density	217,488 per m ² ± 10%
 Pile weight	730gsm ± 10%
Total weight	4,345gsm ± 10%
Primary backing	Polyester
 Secondary backing	Modified bitumen and polyester fleece
 Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.6

 Light fastness BS EN ISO 105: B02	≥5
 Dimensional stability BS EN 986	≤0.2%
 Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Alignment carpet tiles are manufactured using 100% green electricity.
 CRI CRUK	Alignment meets 01350 indoor air quality standard. Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
 Installation method	Broadloom, quarter turn or tessellated
Alignment carpet tiles meet the requirements of EN 14041	
 Reaction to fire EN 13501-1:2002	B _{f1} -s1
 Slip resistance DS	DS: ≥0.30
 Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®] ethos

A textured loop pile carpet tile that has also been tip sheared, Ethos has a textured cut and loop effect that disguises tile edges beautifully and delivers a deceptive broadloom appearance.


The cut and loop construction and the 800gsm pile weight combine to create a tile that will withstand the heaviest of foot traffic, making Ethos an ideal and practical solution for the busy office environment.

The diffused visual pattern is created by a unique medley of solution-dyed yarns within the pile, ensuring that the 13 subtle colourations will not fade or dull over time, or through intensive cleaning.

The flecks of colour in the cut pile and the tonal nature of the base colours ensure that Ethos will co-ordinate with any interior and add a luxurious touch to the design scheme. Tile edges disappear and the result is an installation with a deceptive broadloom appearance.



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

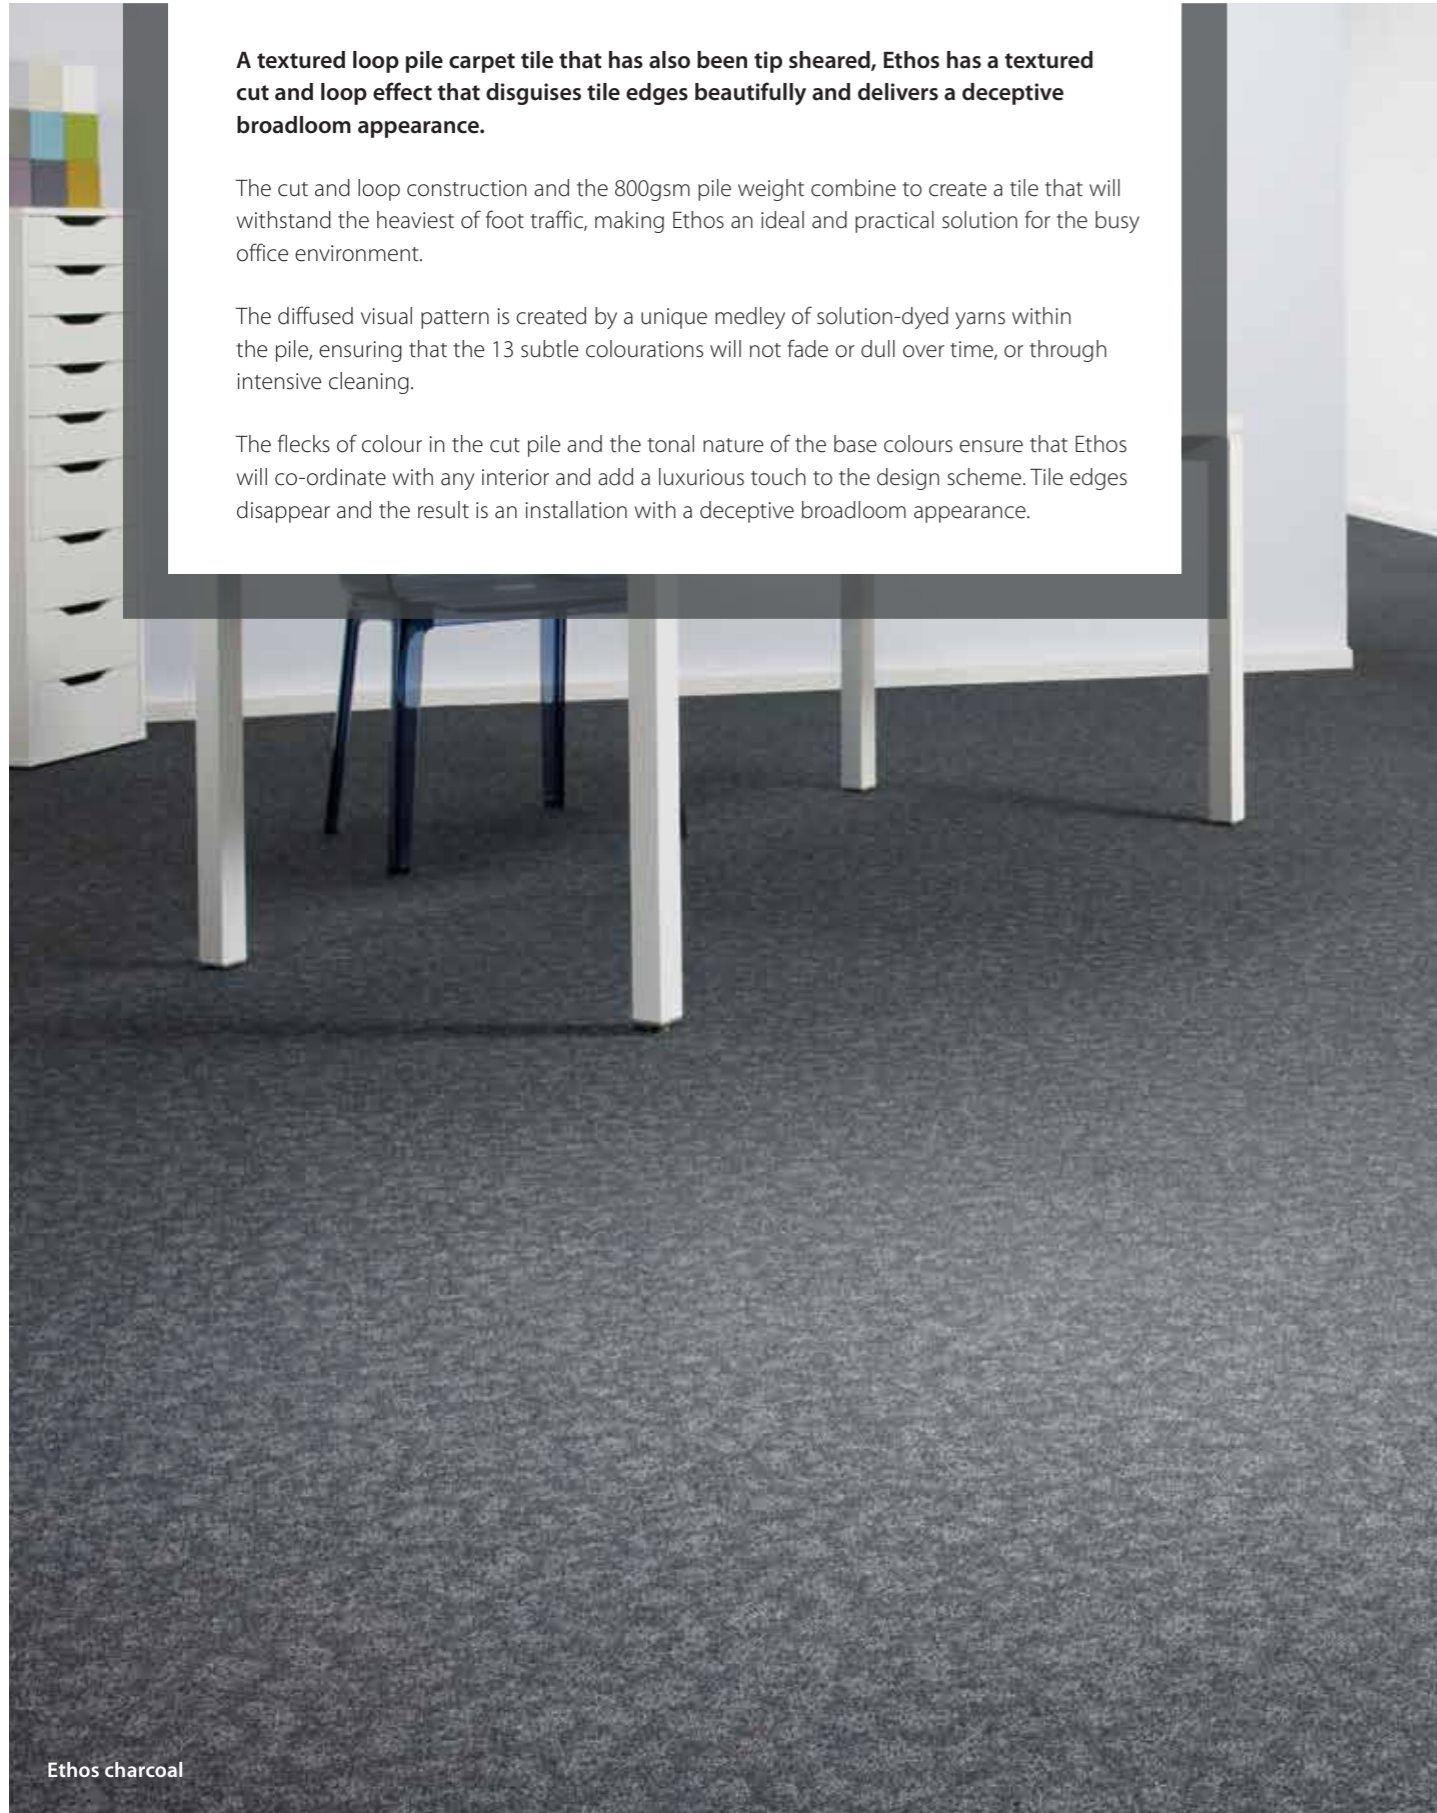

Ethos charcoal

Ethos carpet tiles meet the requirements of EN 1307


Description	Cut and loop pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	8.5mm ± 10%
Pile height	5.0mm ± 0.5mm
Collection size	13 colourways, 4m ² per box
Application EN1307:2008	Class 33, Suitable for any type of heavy contract application
Pile composition	100% Aquafil 'Alto Chroma' polyamide
Dye method	100% solution dyed
Stitch density	189,000 per m ² ± 10%
Pile weight	800gsm ± 10%
Total weight	4,415gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4 Overall R value: 2.6

	Light fastness BS EN ISO 105: B02	≥6
	Dimensional stability BS EN 986	≤0.2%
	Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels. Ethos carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
	BRE	Ethos carpet tiles are manufactured using 100% green electricity. Awarded BRE Global's Environmental Profiles Certification.
	CRI	Ethos meets 01350 indoor air quality standard.
	CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
	Installation method	Broadloom, quarter turn or tessellated
Ethos carpet tiles meet the requirements of EN 14041		
	Reaction to fire EN 13501-1:2002	B _{fl} -s1
	Slip resistance	DS: ≥0.30
	Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

tessera[®]

Cut Pile

Softer and more luxurious than loop pile, cut pile carpet tiles are ideal for boardrooms and meeting rooms, in addition to general office environments. Tessera offers two stunning tufted cut pile tile ranges to meet different aesthetic requirements, and there are further fusion bonded cut pile options featured in the Westbond collection on page 62.

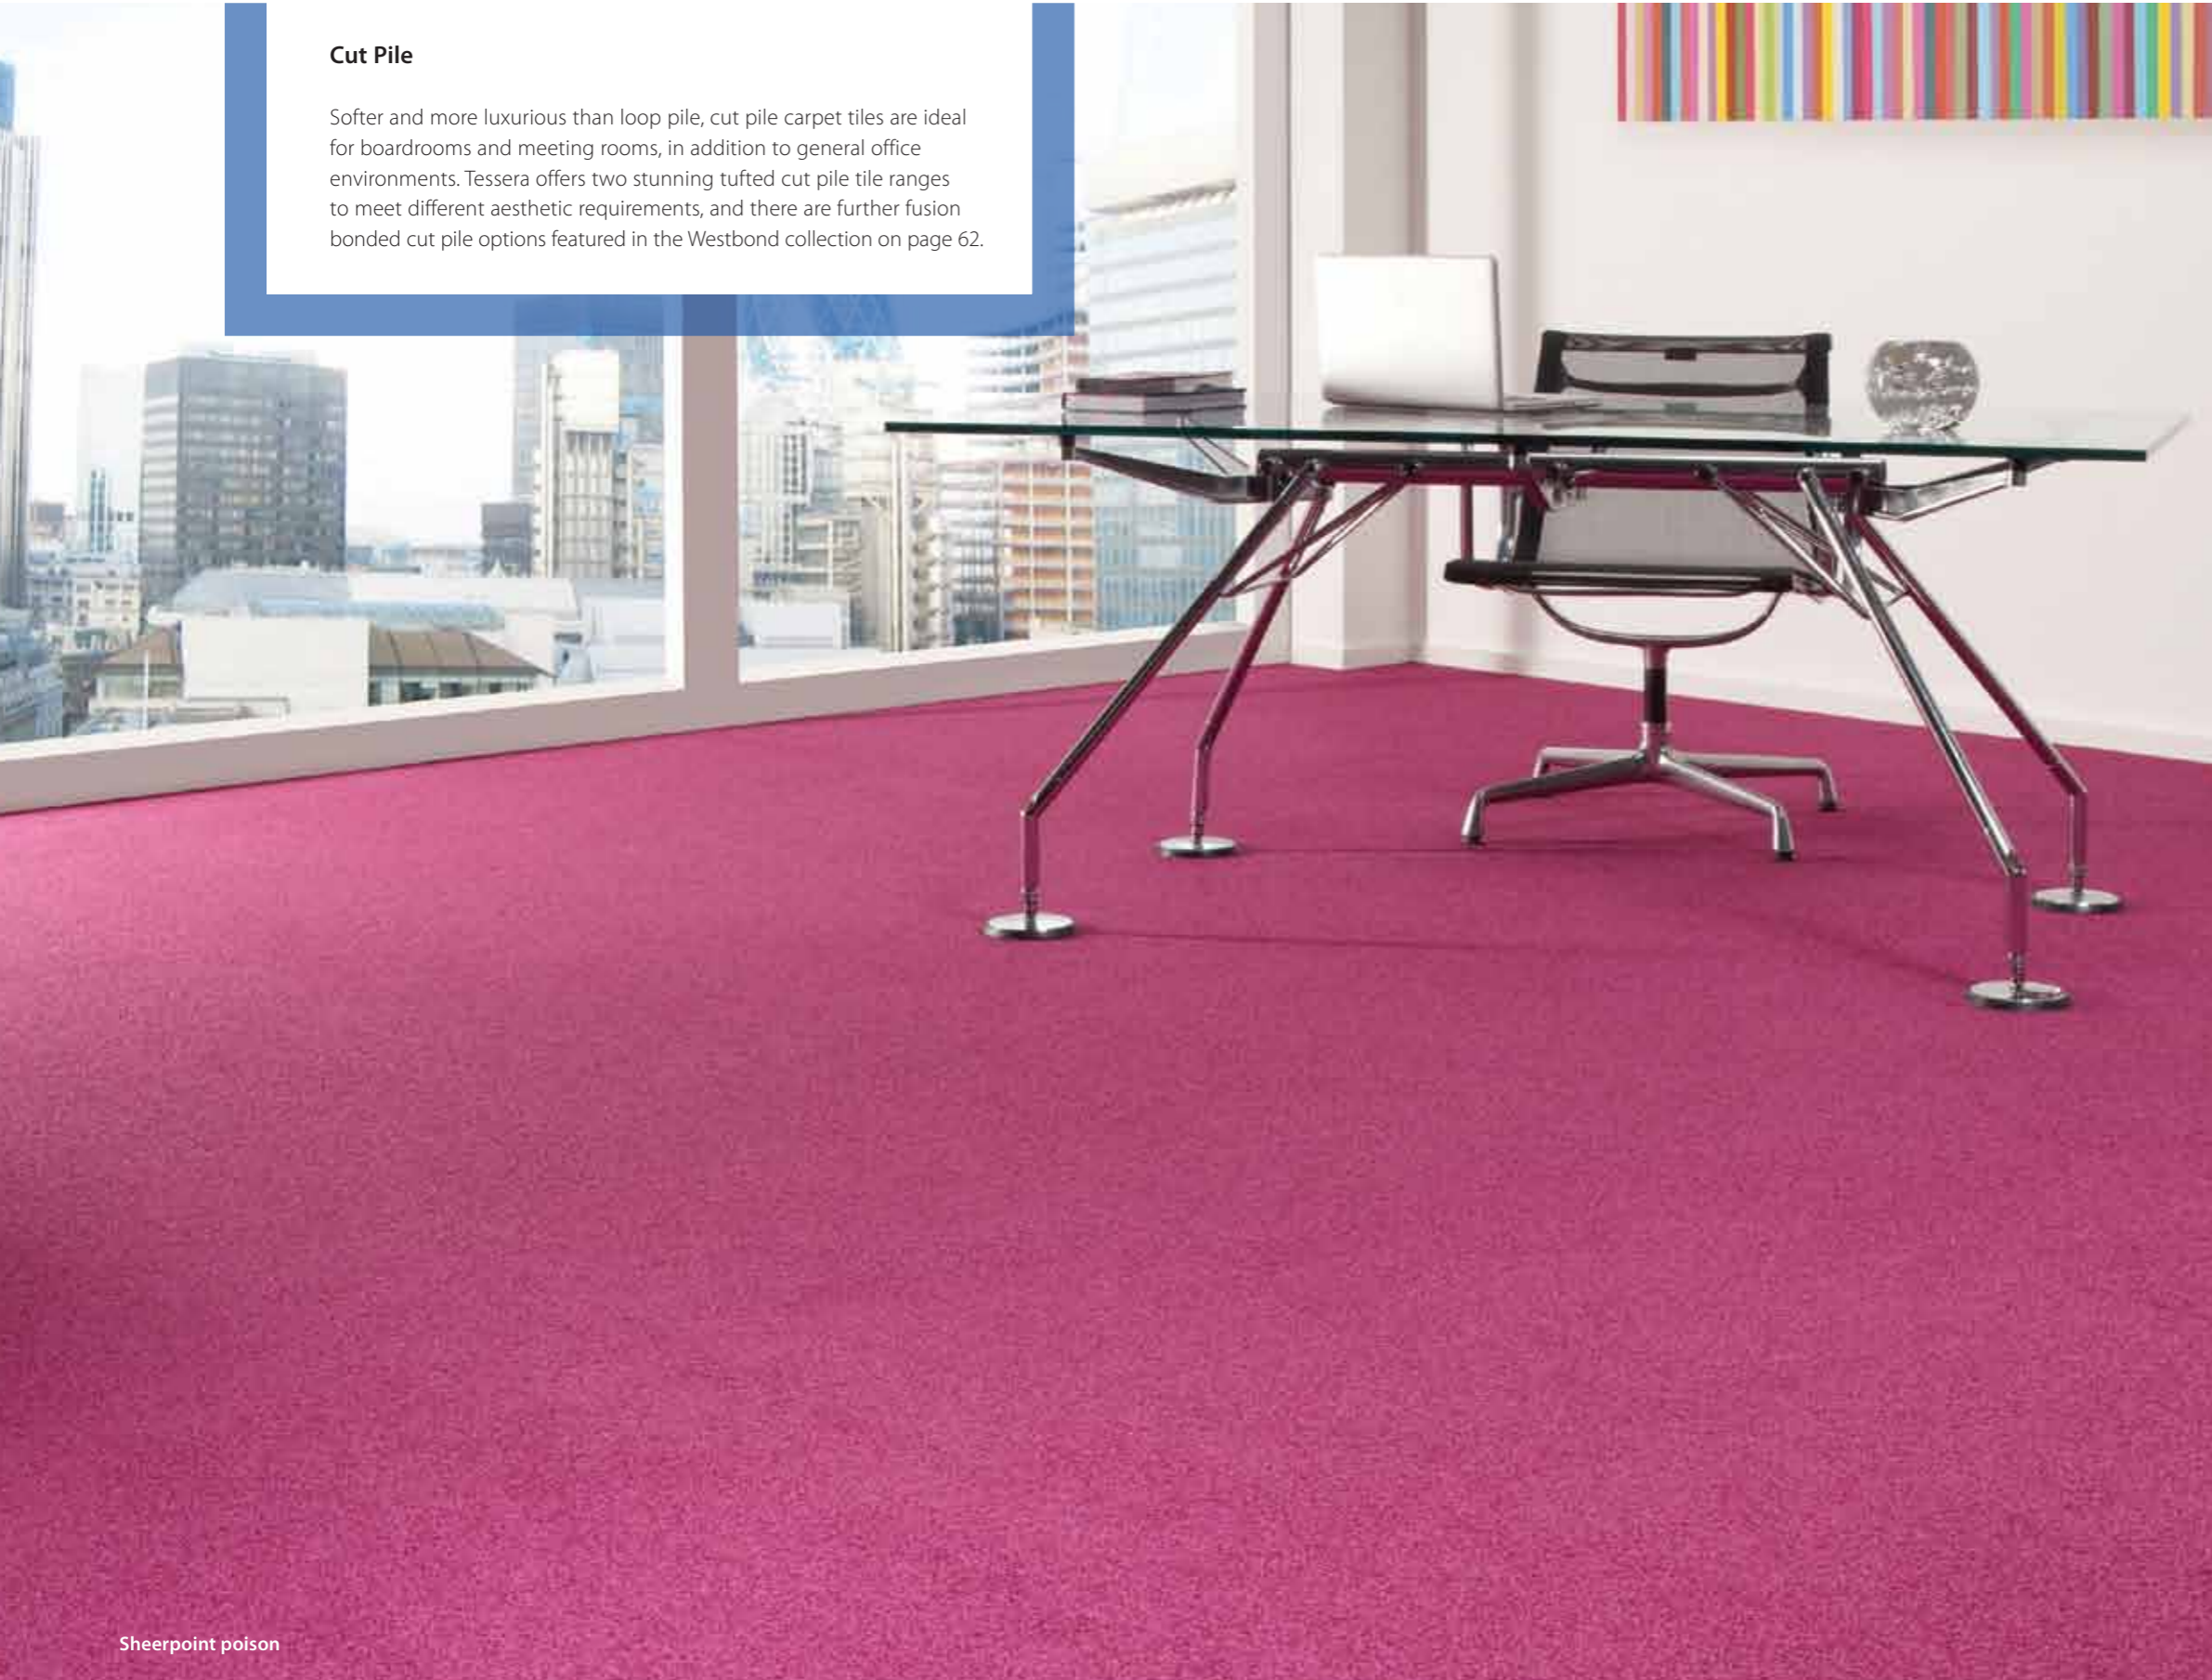

tessera[®] acrobat

tessera[®] sheerpoint

Sheerpoint poison

tessera[®] acrobat


Acrobat combines the sheer convenience, practicality and hardwearing features of a heavy contract carpet tile with the stunning appearance and tactile benefits of a traditional cut pile carpet.

Constructed from Invista Antron polyamide 6.6 yarn, with its generous pile weight and cut pile tufted construction, Acrobat offers superior underfoot comfort and a touch of luxury.

Available in a range of 32 modern and commercially appealing colourways, Acrobat will complement all types of commercial interiors and is particularly suitable for boardrooms, receptions and hospitality areas.



Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

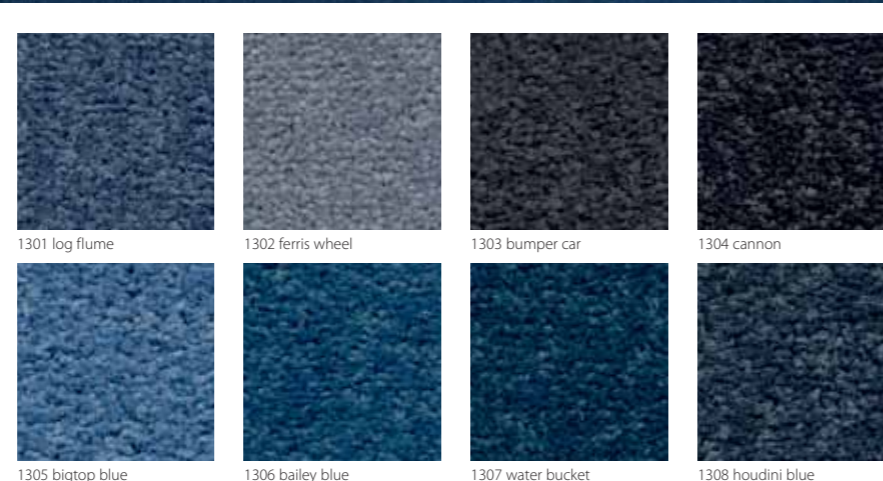

Acrobat bailey blue

1305 bigtop blue 1306 bailey blue 1307 water bucket 1308 houdini blue

Acrobat carpet tiles meet the requirements of EN 1307

Description	Cut pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	8.0mm ± 10%
Pile height	5.0mm ± 0.5mm
Collection size	32 colourways, 5m ² per box
Application EN1307:2008 Class 33, Suitable for any type of heavy contract application	
Pile composition	100% Antron [®] polyamide 6.6
Dye method	100% piece dyed
Stitch density	181,102 per m ² ± 10%
Pile weight	1,050gsm ± 10%
Total weight	4,650gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use BS EN 985:2001	Minimum R value: ≥2.4

Light fastness BS EN ISO 105: B02	≥5
Dimensional stability BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels.
CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.
Installation method	Broadloom, quarter turn or tessellated

Acrobat carpet tiles meet the requirements of EN 14041

Reaction to fire EN 13501-1:2002	B _{fl} -s1
Slip resistance	DS: ≥0.30
Electrical resistance BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing



tessera® sheerpoint

All types of commercial interiors are immediately brought to life with Sheerpoint, an exciting portfolio of vibrant cut pile carpet tiles designed to meet the most demanding applications.

Sheerpoint is a tonal twist cut pile carpet tile with subtle texture that provides a particularly effective broadloom appearance and has light refracting, soil hiding properties. The core colour bank of 48 lively shades spans the entire spectrum, yet for those clients requiring additional choice, a virtually infinite number of additional shades can be rapidly manufactured to order.

With its generous 1000gsm cut pile weight, Sheerpoint looks luxurious and offers a high level of underfoot comfort. Manufactured from Antron® fibre, its appearance is matched by its performance. Optional Teflon® carpet protection is also available for exceptionally demanding locations.




1151 mocha

1152 chinchilla




1153 dark mountain

1154 deep forest

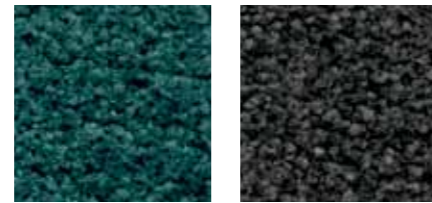


1155 old jade

1156 torrent

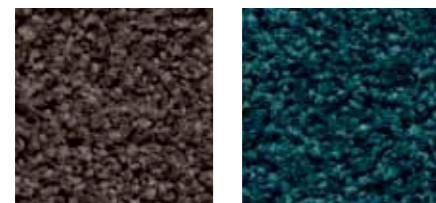


1157 sultana

1158 amazonia

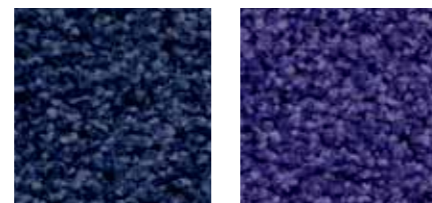


1159 blue dazzle

1160 inky

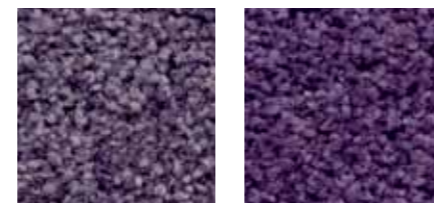


1161 crocus

1162 concord

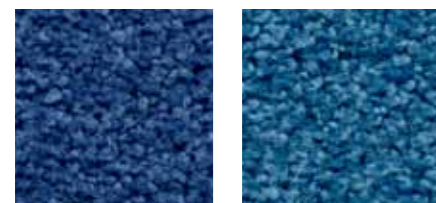

1163 force nine

1164 horizon

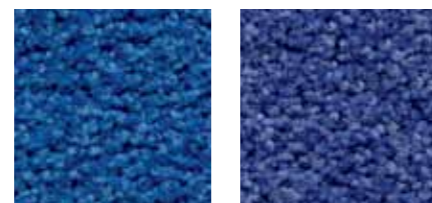

1165 bermuda blue

1166 storm blue



1167 conker

1168 raisin

Sheerpoint poison



1169 poison

1170 burnish

1171 orange glow

1172 lipstick

1173 watermelon

1174 pale orchid



1175 lilac trace


1176 tan

1177 moroccan sun

1178 golden blaze

1179 natural hue

1180 maple

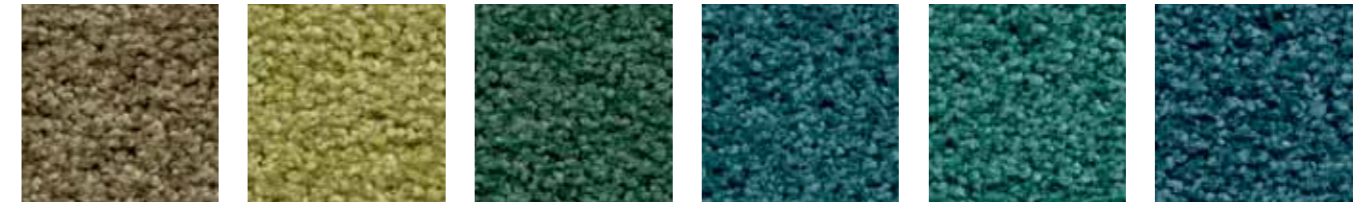

1181 olive grove


1182 pistachio

1183 ivy

1184 lagoon

1185 turquoise

1186 cayman cruise

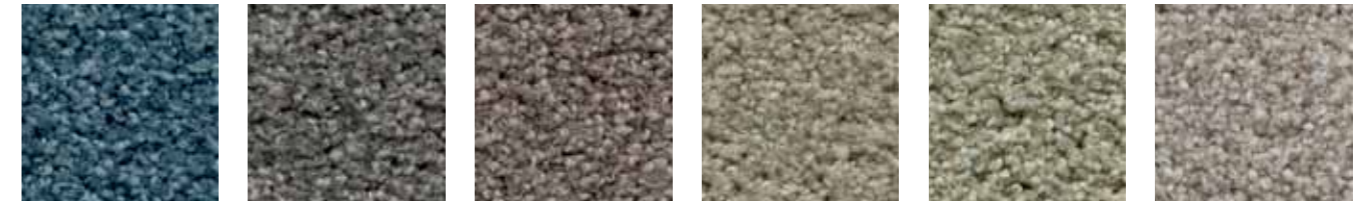

1187 icewater

1188 pewter

1189 pebble

1190 irish linen

1191 willow tree

1192 dove tail



1193 shandy

1194 toffee

1195 corn

1196 wheat

1197 caramel

1198 buttermilk

Sheerpoint carpet tiles meet the requirements of EN 1307

Description	Cut pile carpet tile
Dimensions	50cm x 50cm (Other sizes available for special orders)
Total thickness	10.5mm ± 10%
Pile height	6.0mm ± 0.5mm
Collection size	48 colourways, 4m ² per box
Application	EN1307:2008 Suitable for any type of heavy contract application
Pile composition	100% Antron® polyamide
Dye method	100% piece dyed
Stitch density	204,724 per m ² ± 5%
Pile weight	1,000gsm ± 10%
Total weight	5,438gsm ± 10%
Primary backing	Polyester
Secondary backing	Modified bitumen and polyester fleece
Castor chair use	Minimum R value: ≥2.4 Overall R value: 2.8

Light fastness	BS EN ISO 105: B02	≥5
Dimensional stability	BS EN 986	≤0.2%
Environmental	Materials used in the construction of Tessera carpet tiles are chosen for their low volatile organic compound (VOC) levels.	
CRUK	Forbo Flooring UK Ltd is a member of Carpet Recycling UK.	
Installation method	Broadloom, quarter turn or tessellated	

Sheerpoint carpet tiles meet the requirements of EN 14041

Reaction to fire	EN 13501-1:2002	B _{fl} -s1
Slip resistance		DS: ≥0.30
Electrical resistance	BS ISO 10965:1998	<1 x 10 ⁹ Ω: Static dissipative Body voltage: Pass (< 2kV) Lifetime protection through the use of permanent anti-static yarn and backing

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

The Sottsass DNA Collection

FORBO FLOORING SYSTEMS IS PROUD TO LAUNCH ITS LATEST COLLABORATION WITH DESIGN STUDIO SOTTASS ASSOCIATI OF MILAN: DNA. CONCEIVED TO DELIVER THE BLUEPRINTS OF LIFE UNDERFOOT, THIS INNOVATIVE CREATION BREAKS DOWN THE BOUNDARIES OF TRADITIONAL CARPET TILING GIVING THE FREEDOM TO BLEND, FUSE AND CREATE SPACES WITH INDIVIDUAL CHARACTERISTICS.


DNA
RNA

DNA RNA

THE DNA COLLECTION IS THE RESULT OF A CREATIVE COLLABORATION BETWEEN FORBO FLOORING AND THE DESIGN STUDIO SOTTASS ASSOCIATI, MILAN, ITALY.

INSPIRED BY DNA A COMPLETE CARPET TILING SYSTEM HAS BEEN CONCEIVED AND DEVELOPED FOR INTERIOR ARCHITECTURE.


A NEW CONCEPT WHICH BREAKS DOWN THE BOUNDRIES OF TRADITIONAL CARPET TILING WITH A SIMPLE COMBINATION OF ELEMENTS, COLOURS AND TONES GIVING THE FREEDOM TO BLEND, FUSE AND CREATE THE BLUEPRINTS OF LIFE UNDER FOOT.

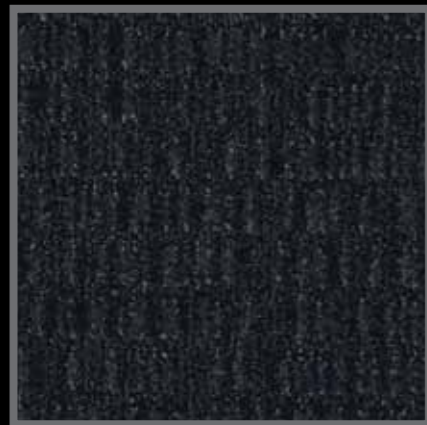


DNA941942



DNA944943

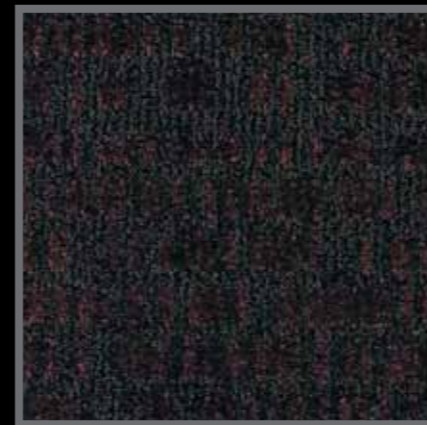

DNA946945



RNA9941




RNA9942



RNA9943




RNA9944



RNA9945



RNA9946

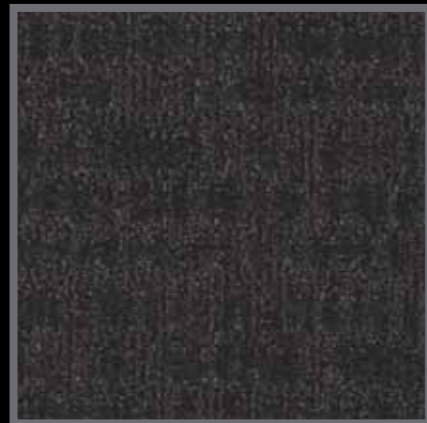

DNA947948




DNA949942



DNA950951



RNA9947



RNA9948



RNA9949




RNA9942



RNA9951




RNA9950

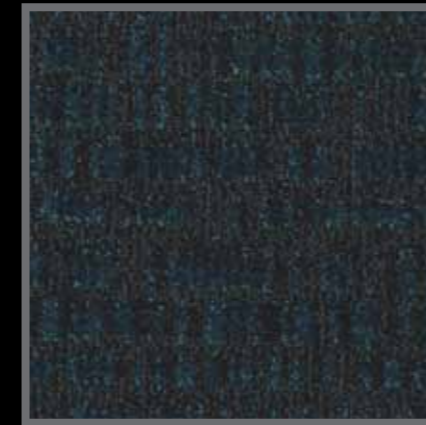

DNA952953



RNA9953



RNA9952



946945



DNA954955



RNA9954



RNA9955

DESCRIPTION

DIMENSIONS

TOTAL THICKNESS

PILE HEIGHT

INSTALLATION METHOD

PILE COMPOSITION

DYE METHOD

PILE WEIGHT

TOTAL WEIGHT

STITCH DENSITY TUFTS PER M²

BACKING

APPLICATION EN1307

REACTION TO FIRE

SLIP RESISTANCE

ELECTRICAL RESISTANCE



DNA & RNA CARPET TILES
MEET THE REQUIREMENTS
OF EN 14041:2004

DNA

TUFTED CUT AND LOOP
PILE CARPET TILE

50CM X 50CM
16 TILES PER BOX

7.5MM ± 10%

4.0MM ± 0.5MM

BROADLOOM

100% AQUAFIL POLYAMIDE

SOLUTION DYED

750GSM ± 10%

4.365GSM ± 10%

240.883 PER M² ± 10%

MODIFIED BITUMEN
& POLYESTER FLEECE

CLASS 33
HEAVY CONTRACT

B_{FL}-S¹

DS: ≥ 0.30

<1 X 10⁹ Ω:
STATIC DISSIPATIVE
BODY VOLTAGE < 2KV

RNA

FUSION BONDED CUT
PILE CARPET TILE

50CM X 50CM
16 TILES PER BOX

8.1MM ± 10%

7.0MM ± 0.5MM

BROADLOOM

100% POLYAMIDE

HANK DYED

950GSM ± 10%

4.000GSM ± 10%

272.000 PER M² ± 10%

PVC WITH UP TO 74%
RECYCLED CONTENT

CLASS 33
HEAVY CONTRACT

B_{FL}-S¹

DS: ≥ 0.30

<1 X 10⁹ Ω:
STATIC DISSIPATIVE
BODY VOLTAGE < 2KV

westbond®

The Westbond brand and product range is synonymous with total flexibility and sophistication. Blending yarns to order and manufacturing premium quality fusion bonded tiles in an almost infinite number of colourways, with **no minimum order quantity**.

Fusion bonding is a sophisticated method of carpet tile manufacture where individual yarn pile is bonded onto the backing material to make an extremely dense and luxurious product. Each tuft is individual and a high proportion of the yarn is in the wear surface providing a beautiful, rich, velour carpet tile which gives an excellent broadloom appearance.

For the ultimate in flexibility, the Westbond Flex range allows you to create your own floor covering by blending up to four colours from the Westbond palette or from a colour of your choice. Finally, for those looking for a luxurious yet environmentally friendly carpet tile, Westbond Natural provides a solution.

All Westbond carpet tiles utilise a mixed vinyl waste backing which contains up to 74% pre-consumer recycled content, including PVC waste streams from our competitors, thereby decreasing the amount of waste going to landfill from the flooring industry as a whole.



westbond® colour

westbond® flex

westbond® natural

Westbond N9000XL

westbond[®] colour

Westbond carpet tiles are synonymous with total flexibility and sophistication. Blending yarns to order and manufacturing premium quality fusion bonded tiles in an almost infinite number of colourways, with **no minimum order quantity**.

Westbond allows customers to take control of the process of designing luxurious, bespoke carpet tiles with exceptionally heavy pile weights for the most prestigious installations.

Over the next few pages you'll find a selection of 144 of our most popular Westbond plain colours. However, we understand that colour is intensely personal. It has to be just right. So if you can't find that perfect shade, why not come up with your own?

We offer any colour, richly dyed to your unique vision, with **no minimum sales order**.

Qualities available

- 950g/m² polyamide
- 1500g/m² wool/polyamide
- 1800g/m² wool/polyamide
- 2400g/m² wool/polyamide

westbond[®] colour

westbond[®] colour

Shown on this page are our most popular warm colourways. However we understand that colour is intensely personal. It has to be just right. So if you can't find that perfect shade, why not come up with your own. **We offer any colour, richly dyed to your unique vision, with no minimum sales order.**

- Qualities available in all colours
- 950g/m² polyamide
 - 1500g/m² wool/polyamide
 - 1800g/m² wool/polyamide
 - 2400g/m² wool/polyamide




9445 honey



9446 mellow buff




9410 cerise



9405 brick dust



9414 aubergine




9569 coral



9601 oyster




9215 cocoa



9395 caraway




9210 yellow fever




9407 pompadour



9578 poppy



9413 claret




9409 rouge



9443 cognac




9226 tiger




9412 redwood




9577 valentine



9399 spice



9016 maroon



9857 dutch orange



9572 tea rose



9840 dixie plum



9442 acorn




9731 ruby



9568 flamenco




9392 tiger lily




9389 putty




9397 toasted almond



9283 library red



9444 harvest




9734 fawn




9220 sunstroke



9248 sunset gold



9842 crème caramel



9402 shell




9408 mauve mist



9213 peach melba



9532 douglas pink



9219 sandman



9393 bisque



9406 cameo



9411 mulberry



9733 prune



9763 flax



9094 mushroom



9415 bilberry



9836 ground coffee

westbond[®] colour

Shown on this page are our most popular earthy colourways. However we understand that colour is intensely personal. It has to be just right. So if you can't find that perfect shade, why not come up with your own. **We offer any colour, richly dyed to your unique vision, with no minimum sales order.**

- Qualities available in all colours
- 950g/m² polyamide
 - 1500g/m² wool/polyamide
 - 1800g/m² wool/polyamide
 - 2400g/m² wool/polyamide



9594 savannah

9171 greyhound

9440 thyme

9597 pasturale

9837 tarragon

9741 metal

9439 spruce

9488 dove

9432 pistachio

9234 grasshopper

9565 lime

9441 sepia

9854 dolphin

9153 speedy grey

9435 salad days

9429 linden

9224 tundra

9847 gosling

9738 olive grey

9152 merry grey

9485 vapour

9839 aluminium

9835 cannon grey

9740 moonstone

9848 bayleaf

9437 viridian

9228 evergreen

9433 lichen

9599 smoke

9194 deep aqua

9761 neptune

9212 gale cloud

9762 botanic

9570 flint

9422 petrol drop

9430 citrus

9391 turmeric

9579 ocean

9613 jade

9841 fallow

9856 marsh mallow

9388 straw

9017 charcoal

9398 silver mink


9431 pine frost

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

westbond[®] colour

Shown on this page are our most popular cool colourways. However we understand that colour is intensely personal. It has to be just right. So if you can't find that perfect shade, why not come up with your own. **We offer any colour, richly dyed to your unique vision, with no minimum sales order.**


- Qualities available in all colours
- 950g/m² polyamide
 - 1500g/m² wool/polyamide
 - 1800g/m² wool/polyamide
 - 2400g/m² wool/polyamide




9489 battleship




9363 purple



9423 blue heather



9419 violet




9417 glacier




9728 ming blue



9425 royal




9427 deepwater



9735 pewter



9418 pearl blue




9428 blue steel



9424 delft




9002 dark blue




9179 deep sea




9385 deep purple




9484 jet




9739 graphite



9482 slate



9573 azure



9421 bluebird



9236 blue moon




9587 midnight




9760 iron




9490 gunmetal



9481 black pepper




9851 tiber




9317 navy



9742 ivy




9218 fiord



9845 nimbus



9420 wedgwood



9586 lapis




9583 hyacinth



9567 misty day




9855 kingfisher



9592 iris




9591 dust blue



9574 danube



9580 atlantic




9211 blues



9585 crystal



9584 clearwater



9850 lavender



9327 capri blue



9843 blue chill



9582 moody blue



9853 paradise blue



9581 marine

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

westbond[®] flex

Create your own carpet tile with a flex combination.

Westbond flex carpet tiles are the ultimate in customised floor covering design. Simply choose up to four colours from the palette of 144 that you see inside this brochure, or create your own colour, and within two working days, we'll send you a 'pom' that offers a realistic impression of what the finished carpet tile will look like.

Just as with the Westbond plain colours, all Westbond flex tiles are available in a choice of four qualities with **no minimum order quantity.**

Qualities available

- 950g/m² polyamide
- 1500g/m² wool/polyamide
- 1800g/m² wool/polyamide
- 2400g/m² wool/polyamide

westbond[®] flex

westbond[®] flex


How do I create a unique Westbond Flex design?

As you will see from the following page of flex designs, very different effects can be created from simple tone on tone patterns using just two colours, to the more complex designs using four colours.

To create your own Westbond flex design simply choose your desired colours, minimum of two, maximum of four and visit www.forbo-flooring.co.uk/flexcreator. Here, you can request a POM in the colour combination of your choice and within two working days, we'll send you a 'POM' to help you visualise what your design will look like on the floor.

If you'd prefer to speak to someone about your flex design, just ring **0800 231 7369**.

We'd be delighted to help.

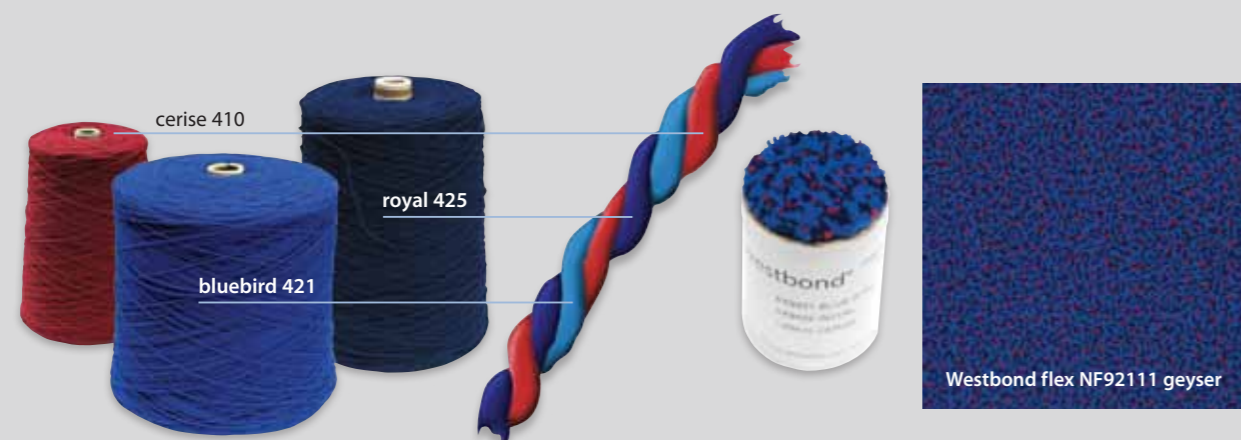

Shown above are three plain yarns, which are combined together to create your chosen flex design. A 'pom' is then created to help you visualise your unique finished carpet tile.

Create a truly individual look for your floor with Westbond flex

Below are just some combinations to stimulate your imagination... please visit www.forbo-flooring.co.uk/flexcreator to create your own flex design.

All examples shown are N9000XL quality but they can also be created in any of the four qualities.


Qualities available

- 950g/m² polyamide
- 1500g/m² wool/polyamide
- 1800g/m² wool/polyamide
- 2400g/m² wool/polyamide


Example 1. Two tone on tone colourways




Example 2. Two contrasting colourways

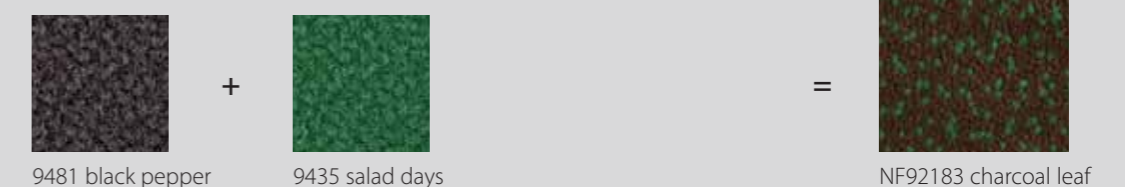


Example 3. Three tone on tone colourways

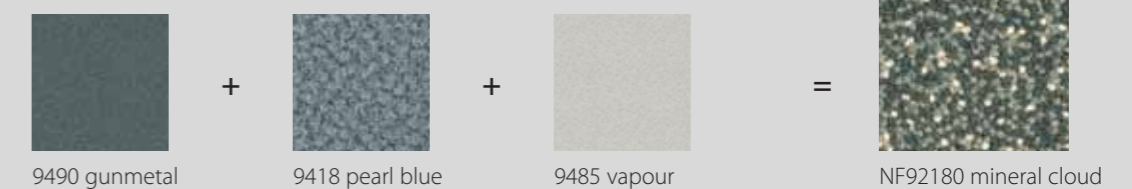

Example 4. Three contrasting colourways

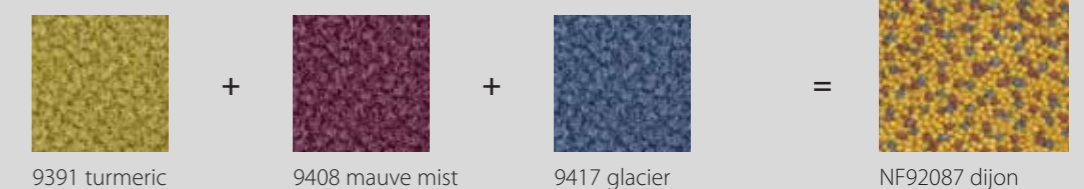

Example 5. Four colourways

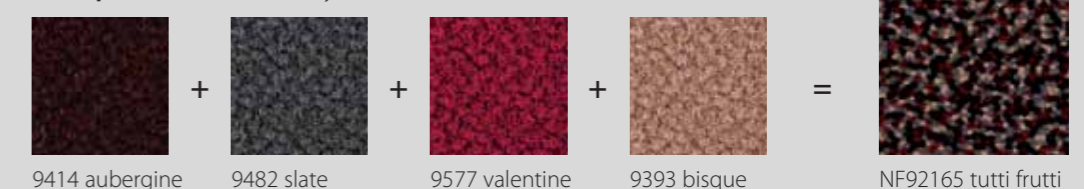

westbond[®] natural

Westbond Natural is a unique collection of commercial carpet tiles containing pure and natural undyed British wool. The range is the perfect answer to today's ecological concerns.

The carpet tile backing minimises environmental impact through its use of up to 74% recycled materials and wool is a sustainable, natural and renewable resource.

westbond[®] natural

westbond® natural

The colours are derived from a blend of fleeces from seven different UK sheep breeds, Herdwick, Swaledale, Shetland, The Derbyshire Gritstone, The Jacob, Dales Bred and Cheviot, resulting in a warm palette of taupes, creams, beiges and umbers.

Forbo has joined the 'Campaign for wool' in an effort to promote the use of this natural and renewable resource.




THE CAMPAIGN FOR WOOL
PATRON: HRH THE PRINCE OF WALES




WF122975U basalt




WF122976U silica



WF122978U quartz



WF122983U wessex




WF122984U cotswold




WF122985U galloway




W12789U manx



W12790U masham




W12791U hampshire




W12794U rutland



W12795U dorset



W12797U honiton



W12921U tussock




Westbond honiton

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.


westbond®

Technical specifications

	N9000XL & Flex polyamide	Wool & Wool Flex	Wool Natural
Description	Fusion bonded cut pile carpet tile	Fusion bonded cut pile carpet tile	Fusion bonded cut pile carpet tile
Dimensions	50cm x 50cm	50cm x 50cm	50cm x 50cm
Total thickness	9mm ± 10%	11mm / 11mm / 16mm ± 10%	9 / 16mm ± 10%
Pile height	7mm + 0mm/-0.5mm	9/9/14mm + 0mm/-0.5mm	7/14mm + 0mm/-0.5mm
Collection size	No limit. Any colour from 1m ² 4.5m ² per box	No limit. Any colour from 1m ² 3.5m ² /3.5m ² /2.5m ² per box	13 colourways 4.5m ² /2.5m ² per box
Application	EN 1307 Class 33 Suitable for any type of heavy contract application	Class 32 Suitable for general commercial applications	Class 32 Suitable for general commercial applications
Pile composition	100% polyamide	80% British wool / 10% polyamide / 10% polyester	80% Undyed British wool / 10% polyamide / 10% polyester
Dye Method	Hank dyed	Hank dyed	Blended Wool (undyed)
Pile density	Grams per cm ³ 0.149 / cm ³	0.167 / 0.187 / 0.167 / cm ³	0.170 / 0.170 / cm ³
Tuft density	Tufts per m ² 272,000 / m ² ± 10%	360,000 / 407,000 / 360,000 / m ²	366,000 / 366,000 / m ² ± 10%
Pile Weight	950gsm ± 10%	1500 / 1800 / 2400gsm ± 10%	1200 / 2400gsm ± 10%
Total weight	4,000gsm ± 10%	4,500 / 4,800 / 5,400gsm ± 10%	4,300 / 5,400gsm ± 10%
Tile backing	PVC incorporating up to 74% pre-consumer recycled content		
Castor chair	EN 985 Minimum R Value: ≥ 2.4	Minimum R Value: ≥ 2.4	Minimum R Value: ≥ 2.4
Light fastness	EN ISO 105-B02 >5	>5	>5
Dimensional stability	EN 986 ≤0.2 %	≤0.2 %	≤0.2 %
Environmental	Materials used in the construction of Westbond carpet tiles are chosen for their low volatile organic compounds. Westbond carpet tiles are made using 100% Green electricity. All Westbond carpet tiles utilise a mixed vinyl waste backing which contains up to 74% pre-consumer recycled content in order to minimise environmental impact. The process uses existing Forbo technology which accesses PVC waste streams from a number of our factories, and also those of competitors within the flooring industry, thereby decreasing the amount of waste material which would otherwise be sent to landfill.		
BRE	Westbond N9000XL and Wool/Wool Flex have been BREEAM certified		
Guarantee	Westbond N9000XL & Flex Polyamide are guaranteed for 10 years under heavy contract use.*	Westbond Wool and Wool Flex carpet tiles are guaranteed for 7 years under general contract use.*	Westbond Natural carpet tiles are guaranteed for 7 years under general contract use.*
* Provided that the carpet tiles have been professionally fitted by a recognised contractor and regularly maintained in accordance with the Forbo requirements currently in force.			
Installation method	Broadloom, tessellated or quarter turn		
Westbond fusion bonded carpet tiles meet the requirements of EN 14041 			
Reaction to fire	EN 13501-1 B _f s1	C _s s1	C _s s1
Slip resistance	EN 13893 DS: ≥ 0.30	DS: ≥ 0.30	DS: ≥ 0.30
Electrical resistance	EN 10965 & EN1815	< 1 x 10 ⁹ Ω: Static dissipative. Body voltage < 2kV	

Forbo reserves the right to improve the specification of its products without giving prior notice. Errors and omissions excepted.

Weights



950g/m² polyamide 1500g/m² wool 1800g/m² wool 2400g/m² wool

Installation and Maintenance:

Shades may vary from batch to batch and should be checked before installation. Batches should not be mixed in the same location. All Westbond products are to be installed in full accordance with Forbo installation instructions and recognised trade standards.

Recycled backing:

All Westbond carpet tiles utilise a recycled mixed vinyl waste backing which contains up to 74% pre-consumer recycled content in order to minimise environmental impact. The process uses existing Forbo technology which accesses PVC waste streams from a number of our factories, and also those of competitors within the flooring industry, thereby decreasing the amount of waste material which would otherwise be sent to landfill.



tessera® westbond®

Enhanced installation

Most of the time you'll find exactly what you're looking for in our standard range of carpet tiles.


However, there may be occasions when you need us to adapt our products for a specific project, adding features to enhance performance or improve the installation. We're able to offer you a range of options to help you meet these more demanding non-standard specifications.

SOFTbac®


When enhanced underfoot comfort and improved thermal and acoustic insulation are required, Forbo can offer SOFTbac®, an optional tile backing made almost entirely from recycled materials. SOFTbac® can be melt-bonded to any tile in the Tessera range (with the exception of our random lay, batchless products) and will improve the tile's performance and overall longevity, so much so that we are prepared to extend the guarantee period by 50%.

Comparative properties SOFTbac® vs Standard Bitumen


Impact Sound Improvement Index (dB)

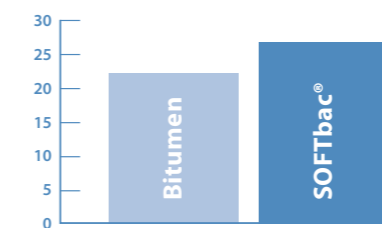

Thermal Insulation Improvement (Tog value)

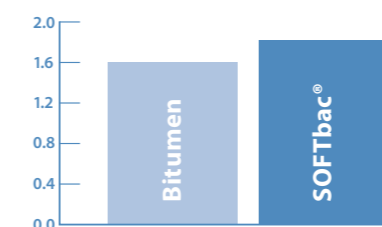

Thickness Retention (%)

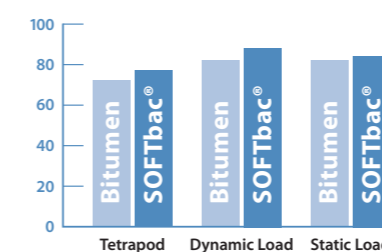

MAGbac

Magnetic backs can be applied to Tessera and Westbond carpet tiles allowing the tiles to be held in place on a metal floor without the use of adhesive or tackifier. These magnetic backs are ideal for use with the raised access flooring panels found in modern office environments. They also allow tiles to be quickly installed, removed and reused in a new installation if needed.



Alternative sizes and shapes

In addition to our standard 50 x 50cm carpet tile format we can also supply Tessera carpet tiles in 60cm x 60cm format to complement the dimensions of modern access flooring panels and in other sizes up to 200cm x 200cm if required. Why not experiment with quirky shapes/cut outs to add fun and interest to your installation.

Design Floors

Large scale interior schemes often require a number of flooring products with different performance requirements to work together to create an overall flow of design.

Plan design:

The in-house design team at Forbo can help bring your ideas to life as part of our Plan Design Service. Whether you are taking inspiration from one particular product which needs to be carried through the plan, or whether you simply need to see your scheme in the flesh, we can create plan boards of your design complete with product samples.

For areas that have specific requirements, our team can offer help and advice on the best products to meet your needs, all designed to work with your visualisation.



Project facts:

Our plan design service has brought to life a striking new refurbishment project at Loughborough University where a wide range of Forbo's textile and resilient products have been specified as part of an exciting integrated flooring solution.

The Loughborough University installation recently won the 'CFA/CFJ installation of the year 2011' award.

Plan Design enquiries:

Tel: 01772 332 620

Fax: 01772 332638



Website

All the information you need, available at the click of a button, any time of the night or day, seven days a week, 365 days a year.

Downloads and Samples

The downloads and samples section allows you to access the broad variety of literature we have available such as product specifications, NBS Specifications, BRE ratings, Material Safety Datasheets, brochures and Cleaning & Installation information.




Samples can be ordered via the web by clicking on the Floor to Door sample service logo.



Forbo floor planner:

Our brand new floor planner on the website allows you to drop products from across our entire portfolio into a selection of room shots, giving you the freedom to visualize how your scheme will look.

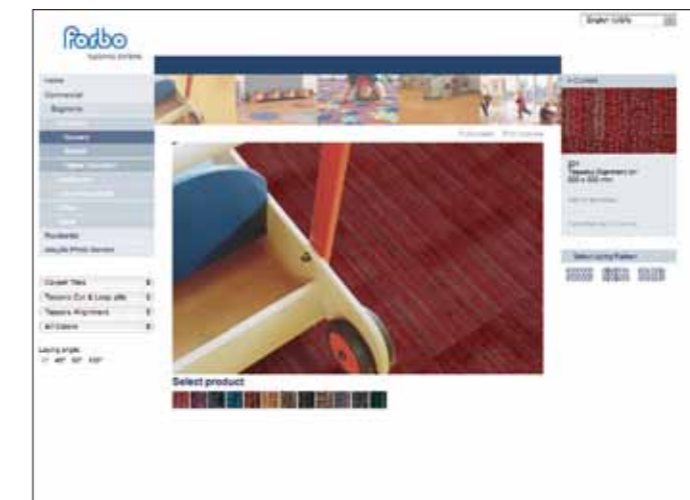

For more information please visit
www.forbo-flooring.co.uk/floorplanner

Whatever the flooring project...

Hopefully this brochure will have inspired you to select Tessera or Westbond for your next project but there may be other areas of the building calling for more specialised flooring products. Forbo offer a wide range of different floor coverings and finishes, providing a complete one-stop solution.

Marmoleum


As world leader in linoleum, Forbo has an exceptionally wide offer of sustainable finishes for floors, walls and surfaces. Marmoleum, Bulletin Board and Furniture linoleum are all made from natural, renewable raw materials making them the perfect answer to today's ecological concerns.

Marmoleum is BRE accredited and has also been independently awarded many international eco labels including the Nordic Swan Mark. In addition, Marmoleum receives an exceptionally good Life Cycle Assessment (LCA) score, details of which can be viewed on our websites www.forbo-flooring.co.uk/www.forbo-flooring.ie

Project Vinyl

Forbo's project vinyl ranges are manufactured using the most advanced production techniques and stand out through their design and functionality. Our comprehensive portfolio spans general purpose, slip resistant, acoustic, static control, design tiles and wet room solutions.

With such a broad range combining performance and design it's always possible to meet both functional and aesthetic needs.

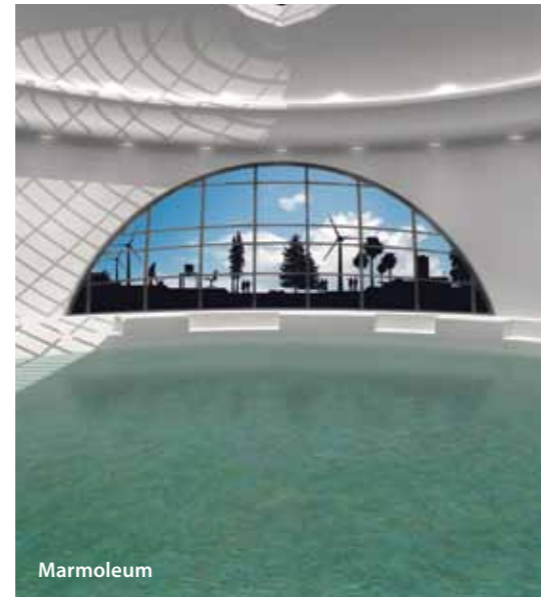

...we have a solution

Coral & Nuway entrance flooring systems

Installing an effective entrance flooring system is the single most important step you can take to maximise the longevity, appearance and performance of your new carpet tile installation and to minimise your long term maintenance requirements.

Whilst its key role is to protect interior floor finishes by scraping the soles of shoes and wheel treads in order to prevent soil and moisture from entering the building, entrance flooring also has a critical role to play in the protection of people – helping to prevent accidents within a building.

With an array of different systems to choose from and a raft of health and safety and disability discrimination legislations to adhere to, the specification of entrance flooring has become quite a complex business.



Fortunately, Forbo Flooring Systems has been providing high performance entrance flooring systems for over 80 years. No other manufacturer comes close to matching the level of experience and technical expertise or the sheer breadth of product range we offer.

Our award winning Coral entrance flooring products are renowned for their quality and longevity and are specified with confidence by architects, designers, facilities managers and flooring contractors everywhere.



If you would like further information on our products please request the relevant brochure on **0800 731 2369** or contact your local Forbo Business Area Manager.



Forbo FloorCare method

Tessera and Westbond carpet tiles

Care and maintenance of Forbo carpet tiles is essential for their longevity and appearance. Soiling and general wear adversely affect the appearance of carpet tiles and should be countered by an effective cleaning programme. A regular cleaning programme will minimise the need for major restorative maintenance. It is important that an effective entrance barrier matting is installed at every exterior entrance. Avoid excessive use of cleaning products, if used, the cleaning products should be rinsed out thoroughly, as the residue may attract dirt.

Cleaning after installation



- Vacuum clean the floor using an upright vacuum cleaner with a powered brush
- Remove stains or spills locally using clean warm water
- Always work from outside of the stain inwards
- Remove excess water
- Allow the floor to dry.

Regular cleaning



- Vacuuming
Regular vacuuming, using an upright vacuum cleaner with a powered brush, is the essential first step in the upkeep of the installation. Heavy traffic areas require more frequent vacuuming than those areas which are less frequented.



- Spot and stain removal
A daily spot and stain removal process should also be implemented using a neutral spotting detergent. The stain should not be allowed to dry as this can make the removal of the stain more difficult.

Vacuuming will not easily remove oily residues from carpet tiles nor the balance of dry soiling. Systems have been developed to maintain appearance longer and remove some of the soiling. These systems allow carpet tiles to be maintained on a periodic basis.

Corrective care



Vacuuming will not remove oily residues from carpet tiles or dried-in soiling. Various systems have been developed to thoroughly clean and maintain the carpet tiles, including:

- Dry Fusion; a thermal, cleaning, protection and drying system
- Rotary shampoo: using rotating brushes and a crystallising shampoo
- Hot water extraction: a very effective way to remove heavy soiling.

Our recommended adhesive for Tessera and Westbond carpet tiles is Eurofix Tack Plus 542 – carpet tile tackifier. This is recommended for standard installations. Please contact customer services for more information.

For more information on cleaning or maintaining your carpet tiles please contact your Forbo Business Area Manager or call **0800 0282 162**.

The next step

For further information on any of the products in this brochure, please don't hesitate to contact us on the numbers below and we'll be pleased to send you additional literature and samples as required.

Please also contact us if you are interested in discussing your bespoke carpet tile design project with us, or if you would like any further details on any product within the FFS portfolio.



Forbo's EC1 showroom is the ideal place to visit when you're looking for that 'perfect colour' or just want to see a wider range of products.

Our full portfolio of brands is on display including Tessera and Westbond carpet tiles, Marmoleum, project vinyl ranges, entrance systems and brand new designs from our Flotex collection.

Why not pop in and enjoy some hospitality while looking at the products or discussing a project with one of our advisors.

We look forward to seeing you.

Please contact
info.flooring.uk@forbo.com
www.forbo-flooring.co.uk
Tel: 0800 731 2369

Or visit our showroom:
London EC1 Showroom
79 St John Street
Clerkenwell
London
EC1M 4NR
Tel: 0207 553 9300

Opening hours:
Monday - Friday 9.00 am - 5.00 pm



Integrated brochures available



Entrance Systems: Coral and Nuway



Flocked Flooring: Flotex Sheet, Flotex Tile and Flotex Sotssass



Resilient Flooring: Marmoleum and Project Vinyl



Integrated Design Solutions

The information in this brochure is correct at the time of going to press. Forbo Flooring UK Limited reserves the right to make changes to the specification and colour of its products from time to time and goods supplied may not conform exactly to those shown in this brochure. Collection updates and content may be updated quarterly.

Please note: Digital representations may vary from the actual product. Please order a sample to see the full effect. Contact 0800 731 2369.

Forbo Flooring Systems is part of the Forbo Group, a global leader in flooring, bonding and movement systems, and offers a full range of flooring products for both commercial and residential markets. High quality linoleum, vinyl, textile, flocked and entrance flooring products combine functionality, colour and design, offering total flooring solutions for any environment.



UK

Forbo Flooring UK Limited
PO Box 1, Kirkcaldy, Fife KY1 2SB

London EC1 showroom

79 St John Street, Clerkenwell
London EC1M 4NR
Tel: 0207 553 9300

For commercial enquiries:

If calling from the North,
Midlands, London & South East
Tel: 0800 0282 162
Fax: 01772 646 912

If calling from Scotland & South West
Tel: 0800 0935 258
Fax: 01592 643 999

Nuway enquiries:

Tel: 01773 740 688
Fax: 01773 740 640

Residential enquiries:

Tel: 0800 0935 846
Fax: 01592 643 999

Email: info.flooring.uk@forbo.com
www.forbo-flooring.co.uk

Samples:

Tel: 0800 731 2369

Ireland

Forbo Ireland Ltd
2 Deansgrange Business Park
Blackrock
Co Dublin

Tel: 00353 1 2898 898
Fax: 00353 1 2898 177
Email: info.ireland@forbo.com
www.forbo-flooring.ie

Registered office:

Forbo Flooring UK Limited
Den Road, Kirkcaldy
Fife KY1 2ER
Registered in Scotland: No 41400

